

petlas

PCR-4X4 & SUV-LTR
TIRES



petlas
TRACK OF TRUST



CONTENTS

2 Range of Petlas Tires

4 Petlas Tires by Size

Passenger Tires

4x4 Tires

LTR Tires

8 General Information

Sidewall Markings

Radial Tire Construction

Important Definitions Related

Dimensions

Speed Index Table

Load Index Table

66 Technical Table

PCR Tires

4x4 Tires

LTR Tires

Passenger Tires

PT311	PT515	PT525	PT535	PT711	PT721	PT731	PT741	W601	W651	PT555*
16	18	20	22	24	26	28	30	34	36	38

SUV, 4X4 Tires

PT411	PT421	PT431	W671
42	44	46	48

LTR Tires

PT825	PT825 plus	PT835	PT875	PT925	PT935	PT945*
52	54	56	58	60	62	64

* UNDER DEVELOPMENT

petlas
TRACK OF TRUST

RANGE OF PETLAS TIRES

Passenger Tires



PT 311 ELEGANT



PT 731 VELOX SPORT



PT 515 IMPERIUM



PT 741 VELOX SPORT



PT 525 PROGREEN



W 601 SNOW MASTER



PT 535 IMPERIUM



W 651 SNOW MASTER



PT 711 VELOX SPORT



PT 555 MULTI ACTION
UNDER DEVELOPMENT
(All Season Tire)



PT 721 VELOX SPORT



SUV - 4X4 Tires



PT 411A/S EXPLERO



PT 835 FULL POWER



PT 421A/S EXPLERO



PT 875 ADVENTE



PT 431H/T EXPLERO



PT 925 FULL GRIP



W 671 EXPLERO



PT 935 FULL GRIP

LTR Tires



PT 825 FULL POWER



PT 945 FULL GRIP
UNDER DEVELOPMENT
(Winter Tire)



PT 825 FULL POWER PLUS

petlas

PETLAS TIRES BY SIZE

PT 311 Elegant

155/80R 12
155/80R 13
165/80R 13
165/80R 13 RF
175/80R 14
165/80R 15
145/70R 12
155/70R 12
165/70R 12
175/70R 12
145/70R 13
155/70R 13
165/70R 13
165/70R 13 RF
175/70R 13
185/70R 13
165/70R 14
165/70R 14 RF
175/70R 14
175/70R 14 RF
185/70R 14
195/70R 14
195/70R 15 RF
155/65R 13
165/65R 13
175/65R 13
155/65R 14
165/65R 14
175/65R 14
175/65R 14 RF
185/65R 14
195/65R 14
195/70R 15
155/65R 13
165/65R 13
175/65R 13
155/65R 14
165/65R 14
175/65R 14
175/65R 14 RF
185/65R 14
195/65R 14
195/70R 15
195/65R 15
165/60R 14

PT 515 Imperium

175/70R 13
175/70R 14
175/70R 14 RF
185/70R 14
175/65R 14
175/65R 14 RF
185/65R 14
175/65R 15
185/65R 15
185/65R 15 RF
195/65R 15
195/65R 15 RF
185/60R 14
185/60R 15
185/60R 15 RF
205/60R 15
215/60R 15
205/65R 16
215/65R 16
175/60R 13
185/60R 14
195/60R 14
185/60R 15
185/60R 15 RF
195/60R 15
205/60R 14
205/60R 15
205/60R 16
185/55R 14
185/55R 15
195/55R 15
195/55R 16
205/55R 16
195/50R 15
195/50R 16 RF

PT 525 Progreen

175/70R 14
175/70R 14 RF
185/70R 14
175/65R 14
175/65R 14 RF
185/65R 14
185/65R 15
185/65R 15 RF
195/65R 15
195/65R 15 RF
205/65R 15
185/60R 14
185/60R 15
185/60R 16
215/60R 16
185/55R 14
185/55R 15
195/55R 15
195/55R 16
205/55R 16
195/50R 15
195/50R 16 RF



PT 535 Imperium

175/70R 14
175/65R 14
185/65R 14
185/65R 15
185/65R 15 RF
195/65R 15
195/65R 15 RF
185/60R 15
185/60R 15 RF
195/60R 15
195/55R 16
205/55R 16
195/50R 16



PT 711 Veloxy Sport

185/60R 13
185/55R 14
185/55R 15
195/55R 15
205/55R 15
195/55R 16
205/55R 16
205/55ZR 16 RF
215/55ZR 16 RF
225/55R 16
225/55ZR 17
195/50R 15
205/50ZR 15
195/50R 16
205/50ZR 16 RF
225/50ZR 16 RF
205/50ZR 17 RF
215/50ZR 17
225/50ZR 17 RF
195/45R 14
195/45R 15
205/45R 15
195/45R 16
205/45ZR 16 RF
205/45ZR 17 RF
215/45ZR 17 RF
225/45ZR 17 RF
245/45ZR 17 RF
225/45ZR 18 RF
245/45ZR 18 RF
205/40ZR 16 RF
215/40ZR 16 RF
225/40ZR 16
205/40ZR 17 RF
215/40ZR 17 RF
235/40ZR 17 RF
245/40ZR 17 RF
215/40ZR 18 RF
225/40ZR 18 RF
235/40ZR 18 RF
245/40ZR 18
225/40ZR 19
245/40ZR 19 RF
255/40ZR 19 RF
215/35ZR 18 RF
225/35ZR 18 RF
265/35ZR 18 RF
225/35ZR 19 RF

PT 721 Veloxy Sport

205/55R 16


PT 731 Veloxy Sport

205/55R 16

PT 741 Veloxy Sport

215/60R 16 RF
225/60R 16
235/60ZR 16
185/55R 14
185/55R 15
195/55R 15
185/55R 16 RF
195/55R 16
195/55 RF16 RFT
205/55ZR 16 RF
205/55 RF16 RFT
215/55ZR 16 RF
225/55ZR 16 RF
205/55ZR 17
215/55ZR 17 RF
225/55ZR 17 RF
235/55ZR 17 RF
235/55ZR 18 RF
195/50R 15
195/50R 16
205/50ZR 15
205/50ZR 16 RF
205/50ZR 17 RF
215/50ZR 17
225/50ZR 17 RF
195/45R 14
195/45R 15
205/45R 15
195/45R 16
205/45ZR 16 RF
205/45ZR 17 RF
215/45ZR 17 RF
225/45ZR 17 RF
245/45ZR 17 RF
245/50 RF18 RFT
195/45R 16 RF
205/45ZR 16 RF
215/45R 16 RF
205/45ZR 17 RF
215/45ZR 17 RF
225/45ZR 17 RF
225/45RF 17 RFT
235/45ZR 17 RF
245/45ZR 17 RF
215/45ZR 18 RF
225/45ZR 18 RF
225/45RF 18 RFT
235/45ZR 18 RF
245/45ZR 18 RF
245/45RF 18 RFT
255/45ZR 18 RF
275/45ZR 18 RF
225/45ZR 19 RF
235/45ZR 19 RF
245/45ZR 19 RF
245/45ZR 19 RFT
255/45ZR 19 RF
205/40ZR 16 RF
205/40ZR 17 RF
215/40ZR 16 RF
215/40ZR 17 RF
235/40ZR 17 RF
245/40ZR 17 RF
215/40ZR 18 RF
225/40ZR 18 RF
235/40ZR 18 RF
245/40ZR 18
225/40ZR 19
245/40ZR 19 RF
255/40ZR 19 RF
205/35R 18*
225/35R 19*
225/35R 19 RFT*
205/35R 18*
225/35R 19 RFT*
245/35R 18 RFT*
225/35R 20 RFT*
245/35R 19 RFT*
255/35R 19 RFT*
295/35R 19*
295/35R 20*
225/30R 20*
235/30R 20*
245/30R 19*
245/30R 19 RFT*
245/30R 20*
255/30R 19 RFT*
255/30R 20*
265/30R 19*
265/30R 20*
275/30R 19*
275/30R 19 RFT*
275/30R 20 RFT*
285/30R 19*
285/30R 20*
285/30R 20 RFT*
295/30R 19*
295/30R 20*
305/30R 19*
305/30R 20*
285/25R 20*
295/25R 20*
305/25R 20*



RF: REINFORCED
RFT: RUN FLAT
* UNDER DEVELOPMENT

petlas

PETLAS TIRES BY SIZE

W 601 Snow Master

155/80R 13
165/80R 13
175/80R 14
145/70R 13
155/70R 13
165/70R 13
165/70R 13 RF
175/70R 13
185/70R 13
165/70R 14
165/70R 14 RF
175/70R 14
175/70R 14 RF
185/70R 14
195/70R 14
195/70R 15 RF
155/65R 13
165/65R 13
175/65R 13
155/65R 14
165/65R 14
175/65R 14 RF
185/65R 14
175/65R 15
165/60R 14

W 651 Snow Master

185/65R 15
185/65R 15 RF
195/65R 15
195/65R 15 RF
205/65R 15
215/65R 15
205/65R 16
215/65R 16
215/65R 16 RF
185/60R 14
195/60R 14
185/60R 15
195/60R 15
205/60R 15
205/60R 16
215/60R 16
225/60R 16
235/60R 16
185/55R 14
195/55R 15
195/55R 16
195/55R 17 RF
205/55R 15
205/55R 15 RF
205/55R 16
205/55R 16 RF
205/55R 17
225/55R 16
225/55R 17
225/55R 17 RF
235/55R 17 RF
235/55R 18 RF
235/55R 19 RF
245/55R 18 RF
245/55R 19 RF
255/50R 18 RF
215/50R 18*
225/45R 18 RF
235/45R 18 RF
245/45R 18 RF
255/40R 19 RF
215/50R 18*
245/50R 18 RFT*
225/45R 18 RFT*
245/45R 18 RFT*
245/45R 19 RFT*
225/40R 18 RFT*
245/40R 19 RFT*
225/40R 18*

PT555 Multi Action

175/65R 14*
185/65R 14*
185/65R 15*
195/65R 15*
205/65R 15*
185/60R 15*
195/60R 15*
205/60R 16*
185/55R 15*



PT 411 A/S Exploro

235/75R 15
205/70R 15
215/70R 15
215/70R 16
225/70R 16 RF
235/70R 16
245/70R 16
265/70R 16
255/70R 16
215/65R 16
215/65R 16 RF
215/65R 17
225/65R 17
235/65R 17 RF
245/65R 17 RF
255/65R 16
255/65R 17
215/65R 17 RF
235/55R 18
235/55R 19 RF
245/55R 19
255/55R 18 RF
255/55R 19 RF
275/55R 19
235/50R 18 RF
255/50R 19 RF
255/50ZR 19 RF
265/50ZR 19 RF
275/45ZR 19 RF
275/45ZR 20 RF
285/45R 19
275/40ZR 20 RF
315/35ZR 20 RF*
315/35ZR 20 RFT*

195/55R 15*
195/55R 16*
205/55R 16*
215/55R 16*
225/55R 16*
225/55R 17*
205/50R 17*
215/50R 17*
225/50R 17*
225/45R 18*
235/45R 17*
245/45R 18*
245/45R 18*
225/40R 18*

PT 421 A/T Exploro

215/80R 15
205/80R 16 RF
235/75R 15
235/70R 16
255/70R 15
265/70R 15 RF
245/70R 16 RF
215/65R 16
265/65R 17 RF
265/60R 18 RF



PT 431 H/T Exploro

235/65R 17 RF
215/60R 17
225/60R 18
235/60R 17
235/60R 18 RF
245/60R 18
255/60R 17
255/60R 18 RF
265/60R 18
215/55R 18
225/55R 18
225/55R 19
225/55R 17
235/55R 17 RF
235/55R 18
225/55R 19
225/55R 17
235/55R 18 RF
235/55R 19 RF
245/55R 19
255/55R 18 RF
255/55R 19 RF
275/55R 19
235/50R 18 RF
255/50R 19 RF
255/50ZR 19 RF
265/50ZR 19 RF
275/45ZR 19 RF
275/45ZR 20 RF
285/45R 19
275/40ZR 20 RF
315/35ZR 20 RF*
315/35ZR 20 RFT*



W 671 Exploro

205/80R 16 RF
215/80R 15
235/75R 15 RF
205/70R 15
215/70R 15
215/70R 16 RF
225/70R 16 RF
235/70R 16
245/70R 16 RF
255/70R 16
265/70R 16
215/65R 17
225/65R 17 RF
235/65R 17 RF
245/65R 17 RF
255/65R 17 RF
265/65R 17 RF
215/60R 17 RF
225/60R 17 RF
235/60R 17 RF
255/60R 17 RF
225/60R 18 RF
235/60R 18 RF
245/60R 18 RF
255/60R 18 RF
265/60R 18 RF
235/55R 17 RF
205/55R 19 RF
215/55R 18
225/55R 18 RF
235/55R 18 RF
255/55R 18 RF
225/55R 19
235/55R 19 RF
245/55R 19
255/55R 19 RF
275/55R 19
235/50R 18 RF
235/50R 19 RF
255/50R 19 RF
255/50 RF19 RF RFT
265/50R 20 RF
245/50R 20
225/45R 19 RF
275/45R 20 RF
285/45R 19 RF
275/40R 20 RF
315/35R 20 RF
255/55R 18 RFT*
275/40R 20 RFT*
315/35R 20*
315/35R 20 RFT*



PT 825 Full Power

195R 14 C
195R 15 C
225/70R 15 C



PT 825 Full Power Plus

5.00R 12 C
155R 12 C
155R 13 C
185R 14 C
195R 14 C
185/75R 16 C
195/75R 16 C
205/75R 16 C
215/75R 16 C
225/75R 16 C
195/70R 15 C
205/70R 15 C
215/70R 15 C
225/70R 15 C
235/70R 15 C
175/75R 16 C
185/75R 16 C
195/75R 16 C
205/75R 16 C
225/75R 16 C
165/70R 14 C
195/70R 15 C
205/70R 15 C
215/70R 15 C
225/70R 15 C
205/65R 15 C
205/65R 16 C
215/65R 16 C
225/65R 16 C
235/65R 16 C



PT 835 Full Power

205/75R 16 C
215/75R 16 C
225/70R 15 C
195/65R 16 C
205/65R 16 C
215/65R 15 C
215/65R 16 C
225/65R 16 C
235/65R 16 C
285/65R 16 C
195/60R 16 C



PT 875 Advente

155R 12 C
155R 13 C
185R 14 C
195R 14 C
185/75R 16 C
195/75R 16 C
205/75R 16 C
215/75R 16 C
225/75R 16 C
195/70R 15 C
205/70R 15 C
215/70R 15 C
225/70R 15 C
215/65R 15 C
205/65R 15 C
205/65R 16 C
215/65R 16 C
225/65R 16 C
235/65R 16 C
285/65R 16 C
195/60R 16 C



PT 925 Full Grip

155R 12 C
155R 13 C
185R 14 C
195R 14 C
175/75R 16 C
185/75R 16 C
195/75R 16 C
205/75R 16 C
215/75R 16 C
225/75R 16 C
195/70R 15 C
205/70R 15 C
215/70R 15 C
225/70R 15 C
195/65R 16 C
205/65R 16 C
215/65R 16 C
225/65R 16 C
235/65R 16 C



PT 935 Full Grip

155R 12 C
155R 13 C
185R 14 C
195R 14 C
185/75R 16 C
195/75R 16 C
205/75R 16 C
215/75R 16 C
225/75R 16 C
195/70R 15 C
205/70R 15 C
215/70R 15 C
225/70R 15 C
215/65R 15 C
195/65R 16 C
205/65R 16 C
215/65R 16 C
225/65R 16 C
235/65R 16 C
285/65R 16 C
195/60R 16 C



PT 945 Full Grip

215/75R 16 C*
235/65R 16 C*



RF: REINFORCED
RFT: RUN FLAT
* UNDER DEVELOPMENT

petlas

SIDEWALL MARKINGS

There are certain markings on the sidewall of tires. You shall find these notices and properties below;

DOT Symbol:

Proves that tyre complies with DOT regulations.

European Commision of Economics Confirmation :

It is the legitimate proof that tires comply with all ECE directives and is represented by a common and unique confirmation number due to regulation.

Max. Load and Pressure Markings:

It is a necessary marking on sidewalls of tires which complies with DOT directives It consists of necessary information about max.load and pressure of tyres.

"Europen Commision of Economics" Tire Verification Symbol:

This symbol proves that the tyre complies with all necessary standards disclaimed by Europen Commision of Economics.

Construction Info:

It represents type of material used in sidewall and base in accordance with DOT regulation.


UTQG Quality Indicator:

- Wear Life Indicator: a tire when tested under standard conditions, wear life as 100 according to the test tire life indicates proportionate . Tire life usage patterns, climate and road conditions may change significantly depending on the servic properties.
- Traction Class Indicator: Under controlled conditions demonstrated the ability to stand on the rubber surface is wet. Traction grades, from highest to lowest are AA, A, B and C.
- Heat Resistance Indicator : Tire's resistance to heat and shows the ability to throw heat. Traction grades, from highest to lowest are AA, A, B and C.

Speed class and load index :

European ETRTO standards maximum load and maximum load the tire can be based on the maximum rate based on the mark is indicating.

- 1 – Brand Logo
- 2 – Construction Information
- 3 – Manufacturing Country
- 4 – Max. Load and Pressure Rating
- 5 – Mold No
- 6 – Construction Type
- 7 – DOT Mark
- 8 – Factory Code
- 9 – Tubeless
- 10 – Product Code
- 11 – Date of Manufacture
- 12 – ECE approval mark
- 13 – Speed Index
- 14 – Safety Warnings
- 15 – Outside
- 16 – ECE approval number
- 17 – Max. Load Index
- 18 – Tire Size
- 19 – Pattern Name
- 20 – Temperature Resistance Index
- 21 – Tire Road Grip Index
- 22 – Tire Wear Index Resistance
- 23 – UTQG Quality Indicator

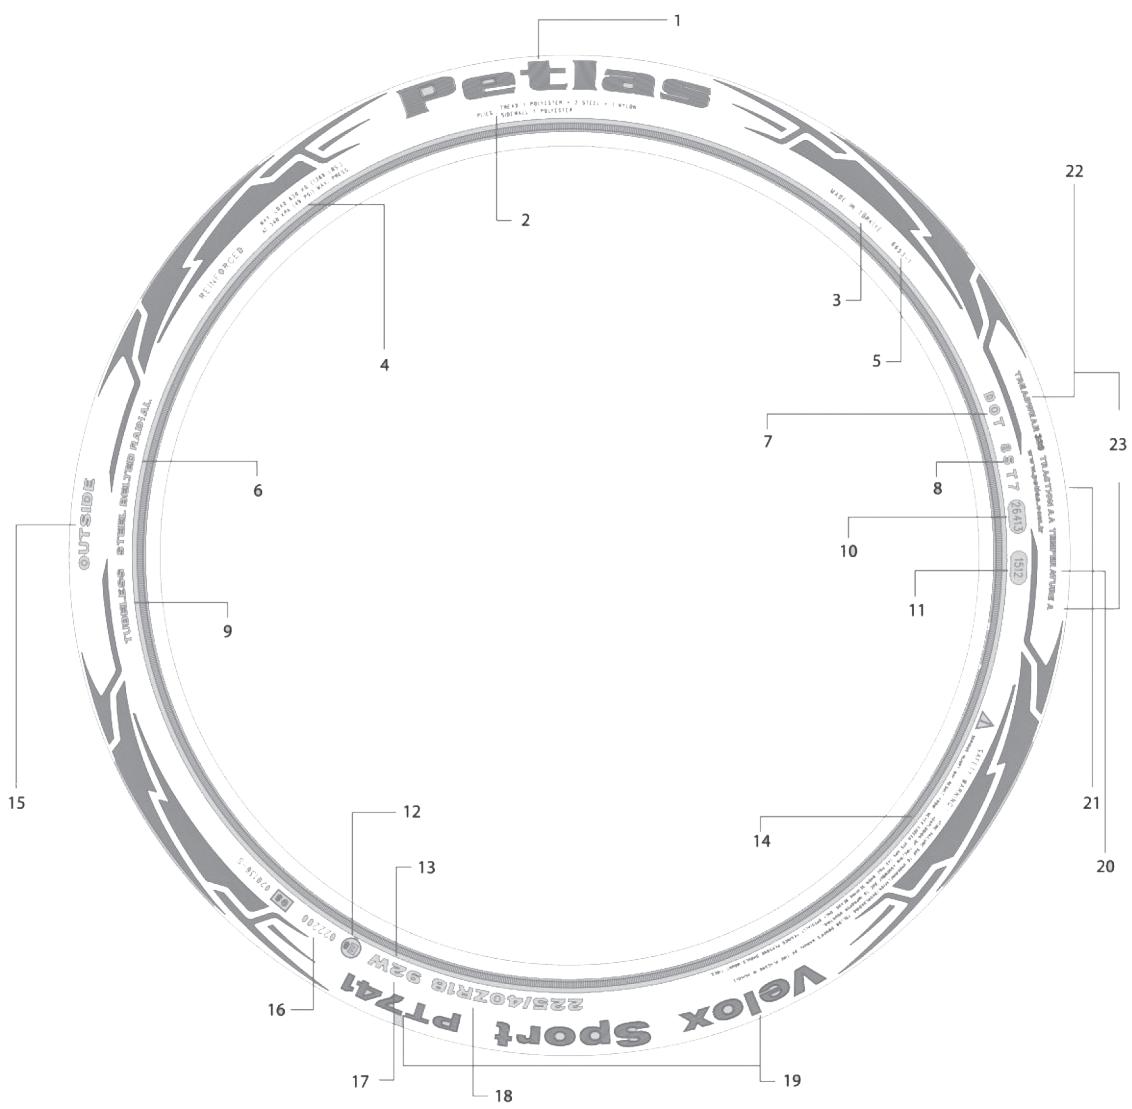

Petlas

Go Forth


*Take the wheel. Explore the world.
All the roads are yours.
Go forth with Petlas PCR tires.*



petlas

www.petlas.com

RADIAL TIRE CONSTRUCTION

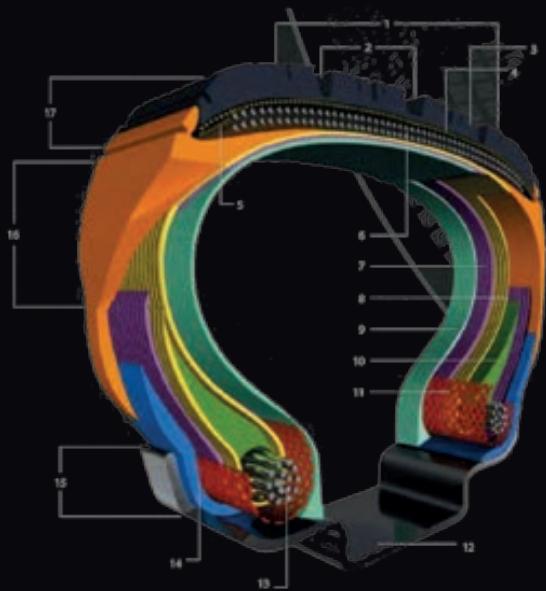

1. Tread
2. Water Channeling
3. Blocks
4. Nylon Impact Layer
5. Reinforcement Layer
6. Steel Cords
7. First Carcass Layer
8. Second Carcass Layer
9. Innerliner
10. Bead Filling
11. Bead Reinforcement fabric
12. Rim
13. Bead Wire
14. Rim Cushion
15. Rim Flange
16. Sidewall
17. Shoulder


IMPORTANT DEFINITIONS RELATED TO THE TIRE

The tire is generally defined with such parameters as the maximum cross-section width corresponding to the standard inflation pressure in the measurement rim, nominal diameter of the rim to be attached, speed index, load capacity index and the cross-section ratio.

EXAMPLE :

Tire size 225/40ZR 18 92W

- Cross – section width 225 mm (Max. distance between side-walls of an inflated tire)
- Series – the cross-section height to crosssection width (%55)
- Radial body structure (R)
- Symbol of rim diameter (inch) (18)
- Load index (92)
- Speed symbol (W)
- Serial no; each producer's coding consisting of the production data
- Abrasion indicator (TWI)
- Usable in a tubeless way or with the tubetype usage
- U.S. Department of Transportation compliance symbol (DOT)
- European Community Compliance symbol and registry no (E)
- Arrow for direction of rotation, inside/outside

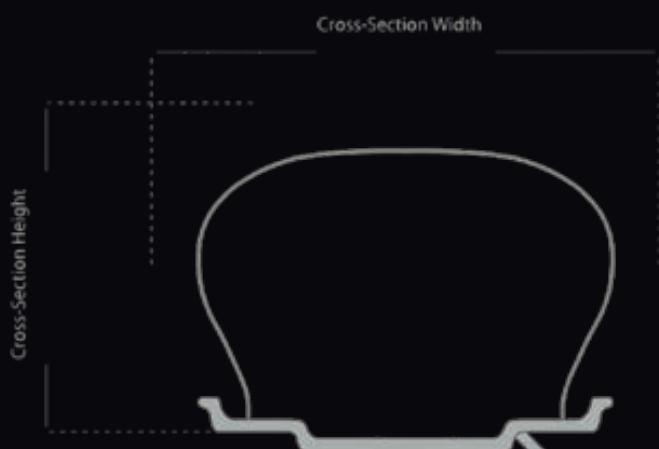

SPEED SYMBOL TABLE

TIRE SIZE

205 / 55 R 16

CHARACTERISTICS OF USAGE

91 H

- SPEED SYMBOL
- LOAD INDEX
- RIM DIAMETER
- STRUCTURE (R=Radial)
- ASPECT RATIO
- SECTION WIDTH



Speed Symbol Table

It is the alphabetical code of the velocity which the tire can perform.

Speed Symbol	Speed Limit (km/h)	Speed Symbol	Speed Limit (km/h)	Speed Symbol	Speed Limit (km/h)
A1	5	D	65	Q	160
A2	10	E	70	R	170
A3	15	F	80	S	180
A4	20	G	90	T	190
A5	25	J	100	U	200
A6	30	K	110	H	210
A7	35	L	120	V	240
A8	40	M	130	W	270
B	50	N	140	Y	300
C	60	P	150	ZR	270 km+

Load Index Table

The load index is a symbol which shows the maximum load capacity of the vehicle per tire.

A	B	A	B	A	B	A	B	A	B	A	B
60	250	96	710	132	2000	168	5600	204	16000	240	45000
61	257	97	730	133	2060	169	5800	205	16500	241	46250
62	265	98	750	134	2120	170	6000	206	17000	242	47500
63	272	99	775	135	2180	171	6150	207	17500	243	48750
64	280	100	800	136	2240	172	6300	208	18000	244	50000
65	290	101	825	137	2300	173	6500	209	18500	245	51500
66	300	102	850	138	2360	174	6700	210	19000	246	53000
67	307	103	875	139	2430	175	6900	211	19500	247	54500
68	315	104	900	140	2500	176	7100	212	20000	248	56000
69	325	105	925	141	2575	177	7300	213	20600	249	58000
70	335	106	950	142	2650	178	7500	214	21200	250	60000
71	345	107	975	143	2725	179	7750	215	21800	251	61500
72	355	108	1000	144	2800	180	8000	216	22400	252	63000
73	365	109	1030	145	2900	181	8250	217	23000	253	65000
74	375	110	1060	146	3000	182	8500	218	23600	254	67000
75	387	111	1090	147	3075	183	8750	219	24300	255	69000
76	400	112	1120	148	3150	184	9000	220	25000	256	71000
77	412	113	1150	149	3250	185	9250	221	25750	257	73000
78	425	114	1180	150	3350	186	9500	222	26500	258	75000
79	437	115	1215	151	3450	187	9750	223	27250	259	77500
80	450	116	1250	152	3550	188	10000	224	28000	260	80000
81	462	117	1285	153	3650	189	10300	225	29000	261	82500
82	475	118	1320	154	3750	190	10600	226	30000	262	85000
83	487	119	1360	155	3875	191	10900	227	30750	263	87500
84	500	120	1400	156	4000	192	11200	228	31500	264	90000
85	515	121	1450	157	4125	193	11500	229	32500	265	92500
86	530	122	1500	158	4250	194	11800	230	33500	266	95000
87	545	123	1550	159	4375	195	12150	231	34500	267	97500
88	560	124	1600	160	4500	196	12500	232	35500	268	100000
89	580	125	1650	161	4625	197	12850	233	36500	269	103000
90	600	126	1700	162	4750	198	13200	234	37500	270	106000
91	615	127	1750	163	4875	199	13600	235	38750	271	109000
92	630	128	1800	164	5000	200	14000	236	40000	272	112000
93	650	129	1850	165	5150	201	14500	237	41250	273	115000
94	670	130	1900	166	5300	202	15000	238	42500	274	118000
95	690	131	1950	167	5450	203	15500	239	43750	275	121500

- (A) Load Index
- (B) The weight a tyre can carry (kg)



PT 311



SUMMER



PT 515



SUMMER



PT 525



SUMMER



PT 535



SUMMER WINTER



PT 711



SUMMER





PASSENGER CAR TIRES

PT 721



PT 731



PT 741



W 601



W 651



PT 555
UNDER DEVELOPMENT



PT 311 Elegant

Developed for performance and handling for the general use segment.
Offer traction and riding comfort combining with durability.



DESIGNED FOR OPTIMAL DRIVING PERFORMANCE

■ PATTERN PROPERTIES



- Circumferential rib on the tread center improves handling and braking performance



- Stiff shoulder blocks enable exceptional cornering performance at high speeds, and provide resistance against irregular wear.



- Computer simulated block array minimizes road / pattern noise, and enhances driving comfort.



- Depending on the size of the tire, three or four different grooves provide excellent water drainage, and reduce the risk of aquaplaning significantly.





● ●

■ ALL SIZES

155/80R 12	77T	145/70R 13	71T	185/70R 14	88T ••	185/65R 14	86T ••
155/80R 13	79T	155/70R 13	75T	195/70R 14	91T ••	195/65R 14	89H ••
165/80R 13	83T	165/70R 13	79T	195/70R 15 RF	97T ••	175/65R 15	84T
165/80R 13 RF	87R	165/70R 13 RF	83T	155/65R 13	73T	185/65R 15	88T ••
175/80R 14	88T	175/70R 13	82T	165/65R 13	77T	195/65R 15 RF	95T ••
165/80R 15	87T	185/70R 13	86T ••	175/65R 13	80T	195/65R 15	91T ••
145/70R 12	69T	165/70R 14	81T	155/65R 14	75T	165/60R 14	75T
155/70R 12	73T	165/70R 14 RF	85R	165/65R 14	79T		
165/70R 12	77T	175/70R 14	84T	175/65R 14	82T		
175/70R 12	80T	175/70R 14 RF	88T	175/65R 14 RF	86T		

RF: REINFORCED



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Patial silica tread compound developed through FST technology provides high handling performance on dry and wet road conditions.
High Tech Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improves uniformity for smoother ride, durability and tread wear.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.

petlas

PT 515 Imperium

Designed and produced with latest technology. It offers good braking performance in both wet and dry conditions, also good mileage.



DESIGNED FOR EXCEPTIONAL GRIP IN
WET AND DRY CONDITIONS

■ PATTERN PROPERTIES



■ Plain block attached to the shoulder provides excellent handling and braking performance.



■ Increased number of tread blocks enables efficient discharge of water.



■ Shoulder blocks offer high cornering performance at high speeds.



■ Inner and outer lateral channels minimize noise and enable smooth and silent drive.



■ Grooves provide excellent water discharge.





■ ALL SIZES

175/70R 13	82H	195/65R 15	91V	175/60R 13	77H	205/60R 16	92H	225/55ZR 16	95W
175/70R 14	84H	195/65R 15	91H	185/60R 14	82H	205/60R 16	92V	225/55ZR 17	97W
175/70R 14 RF	88H	195/65R 15 RF	95H	195/60R 14	86H	185/55R 15	82V	195/50R 15	82V
185/70R 14	88H	205/65R 15	94H	185/60R 15	84H	195/55R 15	85V	205/50R 15	86V
175/65R 14	82H	205/65R 15	94V	185/60R 15 RF	88H	205/55R 15	88V	205/50ZR 16	87W
175/65R 14 RF	86T	205/65R 15 RF	99H	195/60R 15	88H	195/55R 16	87V	205/50ZR 17 RF	93W
185/65R 14	86H	215/65R 15	96V	195/60R 15	88V	205/55R 16	91H	225/50ZR 17 RF	98W
175/65R 15	84H	205/65R 16	95H	205/60R 14	88V	205/55R 16	91V	215/45ZR 17 RF	91W
185/65R 15	88H	215/65R 16	98H	205/60R 15	91H	215/55R 16	93H	225/45ZR 17 RF	94W
185/65R 15 RF	92H	215/65R 16	98V	205/60R 15	91V	215/55R 16	93V		

PT 515 Imperium

RF: REINFORCED



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Silica tread compound developed through FST technology provides superb handling performance on dry and wet road conditions while rolling resistance is reduced significantly. This, in turn, results in less fuel consumption.

High Tech Construction

Jointless "0" degree spiral nylon cover and wide steel belts

High driving safety, comfort and durability.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.

Petlas

PT 525 Progreen

Designed to be more fuel efficient with high mileage performance. Guarantees safety, durability and low rolling resistance



ECO-FRIENDLY TIRE DESIGNED FOR ULTIMATE TRACTION AND HANDLING

■ PATTERN PROPERTIES



- Thanks to its asymmetrical pattern design enables high performance on both wet and dry conditions.
- Low rolling resistance by specially developed tread compound.
- Special tread blocks minimize road noise.
- Three grooves offer fast and effective discharge of water.





■ ALL SIZES

175/70R 14	84T	195/65R 15	91H	215/60R 16	95V
175/70R 14RF	88T	195/65R 15	91V	185/55R 14	80H
185/70R 14	88T	195/65R 15RF	95T	185/55R 15	82V
175/65R 14	82T	205/65R 15	94H	195/55R 15	85H
175/65R 14RF	86T	185/60R 14	82H	195/55R 16	87H
185/65R 14	86T	185/60R 15	84H	205/55R 16	91H
185/65R 15	88T	185/60R 15RF	88H	195/50R 15	82H
185/65R 15	88H	195/60R 15	88H	195/50R 16RF	88V
185/65R 15RF	92H	205/60R 16	92H		
195/65R 15	91T	205/60R 16	92V		

RF: REINFORCED



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions. Rolling resistance is reduced significantly, resulting in lower fuel consumption.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improve uniformity for smoother ride, durability and tread wear.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.

PT 535 Imperium

All season car tire which combines high performance on wet and dry conditions. Offers very good riding comfort and high mileage.



MAXIMUM MILEAGE PERFORMANCE

■ PATTERN PROPERTIES



■ Center rib on the center enables handling and braking performance.



■ Better grip and traction on wet surface with optimized sipe density.



■ Computer simulated block array minimizes road /pattern noise and enhances driving comfort.



■ Four grooves offer fast and effective discharge of water.





■ ALL SIZES

175/70R 14	84H	185/60R 15	84H
175/65R 14	82H	185/60R 15RF	88H
185/65R 14	86H	195/60R 15	88H
185/65R 15	88H	205/55R 16	91H
185/65R 15RF	92H	195/55R 16	87H
195/65R 15	91H	195/50R 16	84H
195/65R 15RF	95H	RF: REINFORCED	

PT 535 Imperium



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Patial silica tread compound developed through FST technology provides high handling performance on dry and wet road conditions.
-----	------------------------	--

High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improve uniformity for smoother ride, durability and tread wear.
-----------------------------------	--	---

Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.
--	--	---

petlas

PT 711 Velox Sport

Designed and developed for ultra-high performance sport cars. Its aggressive pattern design and construction increase handling performance on both wet and dry surfaces.



FEEL THE TORQUE WITH
STYLISH PATTERN DESIGN

■ PATTERN PROPERTIES



- Aggressive pattern design.
- Strong shoulder blocks offer exceptional cornering performance at high speeds.
- V Shaped main grooves discharge water effectively on wet surfaces.





■ ALL SIZES

185/60R 13	80H	225/55R 16	95V	195/45R 15	78V	215/40ZR 16 RF	86W	235/40ZR 18 RF	95W
185/55R 14	80H	225/55ZR 17	97W	205/45R 15	81V	225/40ZR 16	85W	225/40ZR 19	89W
185/55R 14	80V	195/50R 15	82V	195/45R 16	80V	245/40ZR 17 RF	95W	245/40ZR 19 RF	98W
185/55R 15	82H	205/50ZR 15	86W	205/45ZR 16 RF	87W	205/40ZR 17 RF	84W	255/40ZR 19 RF	100W
185/55R 15	82V	195/50R 16	84V	205/45ZR 17 RF	88W	215/40ZR 17 RF	87W	215/35ZR 18 RF	84W
195/55R 15	85V	205/50ZR 16 RF	91W	215/45ZR 17 RF	91W	235/40ZR 17 RF	94W	225/35ZR 18 RF	87W
205/55R 15	88V	225/50ZR 16 RF	96W	225/45ZR 17 RF	94W	215/40ZR 18 RF	89W	265/35ZR 18 RF	97W
195/55R 16	87V	205/50ZR 17 RF	93W	245/45ZR 17 RF	99W	225/40ZR 18 RF	92W	225/35ZR 19 RF	88W
205/55R 16	91V	215/50ZR 17	91W	225/45ZR 18 RF	95W	235/40ZR 18 RF	95W		
205/55ZR 16 RF	94W	225/50ZR 17 RF	98W	245/45ZR 18 RF	100W	245/40ZR 18	93W		
215/55ZR 16 RF	97W	195/45R 14	77V	205/40ZR 16 RF	83W				

PT 711 Velox Sport

RF: REINFORCED



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions. rolling resistance is reduced significantly, resulting in low fuel consumption.

High Tech Undertread Construction

Jointless "O" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improves lateral stability in high speed cornering and uniformity for smoother ride.

petlas

PT 721 Velox Sport

Special pattern design decreases noise and increase handling, also very good cornering performance at high speed levels. The outer shoulder construction increases the amount of surface area contacting the road. The inner shoulder increases the contact patch for better braking performance and stability.



OPTIMAL PERFORMANCE IN DRY AND WET CONDITIONS

PATTERN PROPERTIES



- Fast and effective water discharge thanks to its three grooves.
- Special pattern design enables very good braking performance.
- Offers high performance on both dry and wet surfaces.
- Wide shoulder blocks increase the surface amount and grip performance of the tire.
- Outer shoulder design provides outstanding grip performance both wet and dry surfaces.
- Special tread compound minimizes pattern noise and offers high mileage.



■ SIZE

205/55R16 91V

PT 721 Velox Sport



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Silica tread compound developed through FST technology provides superb handling performance on dry and wet road conditions while rolling resistance is reduced significantly. This, in turn, results in less fuel consumption.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

High driving safety, comfort and durability.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.

petlas

PT 731 Velox Sport

Esthetic pattern design blends performance, comfort and quality. Designed for ultra-high performance cars. Computer simulated pattern and special tread compound enable optimum performance on wet and dry road conditions.



DRIVING COMFORT WITH SPECIAL PATTERN DESIGN

■ PATTERN PROPERTIES



- Center block provides stable and a balanced drive.
- Ultimate performance on both dry and wet surfaces thanks to its asymmetrical pattern design.
- Wide shoulder blocks increase the surface amount and grip performance of the tire.
- Outer side, designed more intense, provides grips dry and wet surfaces better with special canal structure and increases the stability of the vehicle.
- Special tread compound minimizes pattern noise and offers high mileage.
- Fast and effective discharge of water thanks to three grooves.



■ ALL SIZES

205/55R 16 91H
205/55R 16 91V

PT 731 Velox Sport



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Silica tread compound developed through FST technology provides superb handling performance on dry and wet road conditions while rolling resistance is reduced significantly. This, in turn, results in less fuel consumption.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

High driving safety, comfort and durability.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.

petlas

PT741 Velox Sport

PT741 is produced for drivers who desire ultimate handling and grip performance without compromising comfort during driving at high speeds



DESIGNED FOR OUTSTANDING HANDLING AND GRIP PERFORMANCE

■ PATTERN PROPERTIES



- Wide center rib increases straight line performance and cornering response effectively on high speeds.



- Special tread design with large blocks increase and improve handling and steering response.



- Offers effective short braking and high performance on both wet and dry surfaces thanks to its asymmetrical pattern.



- In assertive sizes of PT741 rayon carcass, aramid and nylon belts are used. Rayon carcass improves the response of tires from wheel inputs aramid and nylon belts improve the tire footprint at higher speeds.



- Outstanding performance on wet surfaces thanks to its wide straight three channel grooves provides effective discharge of water.



• •

Specially designed tread profile enables exceptional high – speed capabilities , superb handling and cornering response on dry and wet road conditions. Modern tread design and special tread compound provide fuel economy as well as durability. PT741 is developed for a wide range, from sport cars to luxury cars.

*SEE NEXT PAGE FOR ALL SIZES



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions. Rolling resistance is reduced significantly, resulting in lower fuel consumption.
High Tech Cap Ply Construction	Jointless "0" degree spiral Aramid-Nylon Hybrid Layer and wide steel belts	It improves uniformity for smoother ride, durability and tread wear. Hybrid layer improves highspeed stability and cornering at high speeds
Rayon Carcass Ply	Rayon cords are used in carcass plies.	Rayon cords, thanks to its low elongation, improves tire's response to wheel imputs.

petlas

PT 741 VELOX SPORT





■ ALL SIZES

215/60 R16 RF	99V
225/60 R16	98V
235/60 ZR16	100W
185/55 R14	80V
185/55 R15	82V
195/55 R15	85V
185/55 R16 RF	87H
195/55 R16	87V
195/55 R16 RFT	87V
205/55 R16 RFT	91V
205/55 ZR16 RF	94W
215/55 ZR16 RF	97W
225/55 ZR16 RF	99W
205/55 ZR17	91W
215/55 ZR17 RF	98W
225/55 ZR17 RF	101W
225/55 ZR17 RFT	97W
235/55 ZR17 RF	103W
235/55 ZR18 RF	104W
195/50 R15	82V
205/50 ZR15	86W
195/50 R16	84V
205/50 ZR16 RF	91W
225/50 ZR16 RF	96W
205/50 ZR17 RF	93W
205/50 ZR17 RFT	89W
215/50 ZR17 RF	95W
225/50 ZR17 RF	98W
225/50 ZR17 RFT	94W
235/50 ZR18 RF	101W
245/50 ZR18	100W
245/50 RF18 RFT	100W
195/45 R16 RF	84V
205/45 ZR16 RF	87W
215/45 R16 RF	90V
205/45 ZR17 RF	88W
215/45 ZR17 RF	91W
225/45 ZR17 RF	94W
225/45 ZR17 RFT	91W
235/45 ZR17 RF	97W
245/45 ZR17 RF	99W
215/45 ZR18 RF	93W
225/45 ZR18 RF	95W
225/45 ZR18 RFT	91W
235/45 ZR18 RF	98W
245/45 ZR18 RF	100W
245/45 ZR18 RFT	96W
255/45 ZR18 RF	103W
275/45 ZR18 RF	107W
225/45 ZR19 RF	96W
275/45 ZR19 RF	103Y
205/40 ZR16 RF	83W
215/40 ZR16 RF	86W
205/40 ZR17 RF	84W
215/40 ZR17 RF	87W
235/40 ZR17 RF	94W
245/40 ZR17 RF	95W
215/40 ZR18 RF	89W
225/40 ZR18 RF	92W
235/40 ZR18 RF	95W
245/40 ZR18	93W
245/40 ZR18 RFT	93W
255/40 ZR18	95W
275/40 ZR18 RF	103Y
225/40 ZR19 RF	93W
245/40 ZR19 RF	98W
245/40 ZR19 RF	94W
255/40 ZR19 RF	100W
265/40 ZR19 RF	102W
275/40 ZR19 RF	105Y
285/40 ZR19 RF	107W
245/40 ZR20 RF	99W
255/40 ZR20 RF	101W
245/35 ZR17	87W
215/35 ZR18 RF	84W
225/35 ZR18 RF	87W
245/35 ZR18 RF	92W
255/35 ZR18 RF	94W
265/35 ZR18 RF	97W
275/35 ZR18 RF	99W
245/35 ZR19 RF	85W
225/35 ZR19 RF	88W
235/35 ZR19 RF	91W
245/35 ZR19 RF	93W
255/35 ZR19 RFT	92W
255/35 ZR19 RF	96W
265/35 ZR19 RF	98W
275/35 ZR19 RF	100W
275/35RF 19 RFT	96W
245/35 ZR20 RF	95W
255/35 ZR20 RF	97W
255/30 ZR19 RF	91W
265/30 ZR19 RF	93W
275/30ZR 19 RF	96W
275/30ZR 20 RF	97W
235/55R 18*	
275/45R 18 RFT *	

PT 741 Velox Sport

235/45 ZR19 RF	99W
245/45 ZR19 RF	102W
245/45 ZR19 RFT	98W
255/45 ZR19 RF	104Y
205/40 ZR16 RF	83W
215/40 ZR16 RF	86W
205/40 ZR17 RF	84W
215/40 ZR17 RF	87W
235/40 ZR17 RF	94W
245/40 ZR17 RF	95W
215/40 ZR18 RF	89W
225/40 ZR18 RF	92W
235/40 ZR18 RF	95W
245/40 ZR18	93W
245/40 ZR18 RFT	93W
255/40 ZR18	95W
275/40 ZR18 RF	103Y
225/40 ZR19 RF	93W
245/40 ZR19 RF	98W
245/40 ZR19 RF	94W
255/40 ZR19 RF	100W
265/40 ZR19 RF	102W
275/40 ZR19 RF	105Y
285/40 ZR19 RF	107W
245/40 ZR20 RF	99W
255/40 ZR20 RF	101W
245/35 ZR17	87W
215/35 ZR18 RF	84W
225/35 ZR18 RF	87W
245/35 ZR18 RF	92W
255/35 ZR18 RF	94W
265/35 ZR18 RF	97W
275/35 ZR18 RF	99W
245/35 ZR19 RF	85W
225/35 ZR19 RF	88W
235/35 ZR19 RF	91W
245/35 ZR19 RF	93W
255/35 ZR19 RFT	92W
255/35 ZR19 RF	96W
265/35 ZR19 RF	98W
275/35 ZR19 RF	100W
275/35RF 19 RFT	96W
245/35 ZR20 RF	95W
255/35 ZR20 RF	97W
255/30 ZR19 RF	91W
265/30 ZR19 RF	93W
275/30ZR 19 RF	96W
275/30ZR 20 RF	97W

RF: REINFORCED

RFT: RUN FLAT

*UNDER DEVELOPMENT

W 601 Snow Master

High performance winter tire thanks to its tread pattern enables high traction capability on icy surfaces. Cornering and handling no more be a problem on slippery surfaces for drivers.



GRIP THE ROAD SAFELY

■ PATTERN PROPERTIES



- Circumferential blocks improve braking performance.



- Z shape sipes improve handling performance on snowy and icy surfaces.



- Special tread compound minimizes pattern noise and offers high mileage.



- Circumferential three grooves offer excellent water discharge.





● ●

■ ALL SIZES

155/80R 13	79T	165/70R 14 RF	85R
165/80R 13	83T	175/70R 14	84T
175/80R 14	88T	175/70R 14 RF	88T
145/70R 13	71T	185/70R 14	88T ••
155/70R 13	75T	195/70R 14	91T ••
165/70R 13	79T	195/70R 15 RF	97T ••
165/70R 13 RF	83T	155/65R 13	73T
175/70R 13	82T	165/65R 13	77T
185/70R 13	86T ••	175/65R 13	80T
165/70R 14	81T	155/65R 14	75T

165/65R 14	79T
175/65R 14	82T
175/65R 14 RF	86T
185/65R 14	86T ••
175/65R 15	84T
165/60R 14	75T

RF: REINFORCED

■ W 601 Snow Master



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.
-----	------------------------	--

High Tech Undertread Construction	Jointless "O" degree spiral nylon cover and wide steel belts	It improves uniformity for smoother ride, durability and tread wear.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Strengthens the link between tire and rim for a more precise driving experience.

Petlas

W 651 Snow Master

The ideal winter tire for passenger cars. This tire maximizes your vehicle performance on snowy and icy surfaces. Provides confident stopping power and reliable handling during driving.



ULTIMATE GRIP AND BRAKE PERFORMANCE IN HARSH WINTER CONDITIONS

■ PATTERN PROPERTIES



- Wide tread blocks enable confident stopping performance on snowy and icy surfaces.



- Z-shaped sipes ensures handling performance.



- V Shaped tread design on the inner side minimizes noise level and enables comfortable driving.



- High maneuverability capacity thanks to its outer block design.



■ ALL SIZES

185/65R 15	88H	205/60R 15	91H	205/55R 16 RFT	91H	205/50R 16 RF	91H	235/45R 17 RF	97V
185/65R 15 RF	92H	205/60R 16	92H	205/55R 17	91H	225/50R 16 RF	96V	235/45R 18 RF	98V
195/65R 15	91H	215/60R 16	95H	215/55R 16	93H	205/50R 17 RF	93V	245/45R 17 RF	99V
195/65R 15 RF	95H	225/60R 16	98H	225/55R 16	95H	215/50R 17	91H	245/45R 18 RF	100V
205/65R 15	94H	235/60R 16	100H	215/55R 17 RF	98V	215/50R 18	92V	245/45R 19 RF	102V
215/65R 15	96H	185/55R 14	80H	225/55R 17	97H	225/50R 17 RF	98V	225/40R 18 RF	92V
205/65R 16	95H	185/55R 15	82H	225/55R 17 RF	101V	235/50R 19 RF	103V	235/40R 18 RF	95V
215/65R 16	98H	185/55R 16 RF	87H	225/55R 17 RFT	97V	245/50R 18 RF	104V	245/40R 17 RF	95V
215/65R 16 RF	102T	195/55R 15	85H	235/55R 17 RF	103V	195/45R 16 RF	84H	245/40R 18 RF	97V
185/60R 14	82H	195/55R 16	87H	195/50R 15	82H	205/45R 16 RF	87H	245/40R 19 RF	98V
195/60R 14	86H	205/55R 15	88V	205/50R 15	86H	205/45R 17 RF	88H	255/40R 19 RF	100V
185/60R 15	84H	205/55R 15 RF	92V	195/50R 16	84H	215/45R 17 RF	91V	245/50R 18 RFT*	
195/60R 15	88H	205/55R 16	91H	205/50R 16	87H	215/45R 16 RF	90V	225/45R 18 RFT*	
						215/45R 18 RF	93V	245/45R 18 RFT*	
						225/45R 17 RF	94V	245/45R 19 RFT*	
						225/45R 18 RF	95V	225/40R 18 RFT*	
								245/40R 19 RFT*	



W 651 Snow Master

RF: REINFORCED

RFT: RUN FLAT

*UNDER DEVELOPMENT

■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.
-----	------------------------	--

High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improves uniformity for smoother ride, durability and tread wear.
-----------------------------------	--	--

Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.
--	--	---

Petlas

PT 555 Multi Action

It is an all season tire for using in wide range of weather and road conditions. The V-shaped channels offer effective discharge of water, mud and snow. Delivers excellent driving and cornering capabilities and assures safety on both ice and snow thanks to its unique pattern design and special compound. 3PMSF and M+S markings on the tire ensure better grip and braking on snowy roads.



EXCEPTIONAL ALL-SEASON PERFORMANCE

■ PATTERN PROPERTIES



- Block design enables comfort driving and durability.



- Sipes improve handling performance and offers better grip and braking performance.



- V - shaped tread design on the inner side minimises noise and improves comfort.



■ UNDER DEVELOPMENT SIZES

175/65R 14	195/55R 15	225/45R 17
185/65R 14	195/55R 16	225/45R 18
185/65R 15	205/55R 16	235/45R 17
195/65R 15	215/55R 16	235/45R 18
205/65R 15	225/55R 16	245/45R 18
185/60R 15	225/55R 17	225/40R 18
195/60R 15	205/50R 17	
205/60R 16	215/50R 17	
185/55R 15	225/50R 17	

PT 555 Multi Action



■ TECHNOLOGY & BENEFITS

High Tech
Under tread
Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve lateral stability in high speed cornering and
uniformity for smoother ride.

petlas



PT 411

SUMMER WINTER



PT 421

SUMMER WINTER



PT 431

SUMMER



W 671

WINTER





SUV, 4X4 TIRES

Best Quality
Suv, 4x4 Tires

PT 411 Explero A/S

High performance 4x4 SUV tire offers reliable performance through the year. With its special compound mixture shows great traction performance on any kind of surface. Offers superb comfort and very low levels of noise and vibration.



OUTSTANDING DRIVING PERFORMANCE IN ALL WEATHER CONDITIONS

■ PATTERN PROPERTIES



- Special outside block design improves cornering performance and enables four season use.



- Excellent and effective water discharge by four grooves on the tread.



- Thanks to its special compound mixture reduces noise levels and offers comfort during driving.



- Wide contact area distributes the pressure all over the tire and provides outstanding traction.



■ ALL SIZES

235/75R 15 A/S	105H	215/65R 17 A/S	99H
205/70R 15 A/S	96H	225/65R 17 A/S	102H
215/70R 15 A/S	98H	235/65R 17 A/S RF	108H
215/70R 16 A/S	100H	245/65R 17 A/S RF	111H
225/70R 16 A/S RF	107T	255/65R 16 A/S	109H
235/70R 16 A/S	106H	255/65R 17 A/S	110H
245/70R 16 A/S	107H	265/65R 17 A/S	112H
255/70R 16 A/S	111T	215/60R 16 A/S	95H
265/70R 16 A/S	112T	225/60R 17 A/S RF	103H
215/65R 16 A/S	98H	235/60R 16 A/S	100H
215/65R 16 A/S RF	102H		

RF: REINFORCED

PT 411 Exploro A/S



■ TECHNOLOGY & BENEFITS

High Tech
Under tread
Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

It improves uniformity for smoother ride, durability and tread wear.

Improve lateral stability in high speed cornering and
uniformity for smoother ride.

Petlas

PT 421 Explero A/T

Produced to meet the demands of high performance SUV and 4x4 vehicles. Reliable and long lasting all terrain tire thanks to its special compound. Special tread design improves braking performance and reduces irregular wear.



ALL TERRAIN PATTERN WITH UNIQUE TRACTION CAPABILITY

■ PATTERN PROPERTIES



- Circular center block improves straight line performance.



- Tread design guarantees exceptional grip and handling.
High grip on wet surface.



- Comfortable, quiet ride on the road thanks to its special compound.



- Outer and inner shoulder designs prevent the vehicle sinking into the mud.



■ ALL SIZES

205/80R 16 A/T RF	104T
215/80R 15 A/T	102S
235/75R 15 A/T	105T
235/70R 16 A/T	106T
255/70R 15 A/T	108T
265/70R 15 A/TRF	116T
245/70R 16 A/TRF	111T
215/65R 16 A/T	98T
265/65R 17 A/TRF	116S
265/60R 18 A/TRF	114T

RF: REINFORCED

PT 421 Explero A/T



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "O" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.

Petlas

PT 431 Explero H/T

Summer tire developed for luxury SUVs. It combines quality and high performance with its specially developed tread design and compound. Block array maximizes grip performance in every driving situation. Offers short braking distance on wet surfaces.



DESIGNED FOR ULTIMATE DRIVING COMFORT

■ PATTERN PROPERTIES



- Center block improves straight line performance.



- High performance on any kind of surface thanks to its asymmetrical pattern design.



- Reinforced shoulder block increases the surface amount provides and offers high cornering performance.



- Outer side designed more intense, provides better grip on dry and wet surfaces better with special canal structure and increases the stability of the vehicle.



- Three grooves enable effective water discharge.



● ●

■ ALL SIZES

235/65R 17 H/T RF 108V
 215/60R 17 H/T 96V
 225/60R 18 H/T 100H
 235/60R 17 H/T 102V
 235/60R 18 H/T RF 107V
 245/60R 18 H/T 105H
 255/60R 17 H/T 106V ••
 255/60R 18 H/T RF 112V ••

265/60R 18 H/T 110H ••
 265/60R 18 H/T 110V ••
 215/55R 18 H/T 95H
 225/55R 19 H/T 99H
 225/55R 18 H/T RF 98V
 225/55R 17 H/T 97V
 235/55R 17 H/T RF 103V
 235/55R 18 H/T 100V

235/55R 19 H/T RF 105V
 245/55R 19 H/T 103H
 255/55R 18 H/T RF 109V ••
 255/55R 19 H/T RF 111V ••
 275/55R 19 H/T 111V ••
 235/50R 18 H/T RF 101V
 255/50R 19 H/T RF 107V ••
 255/50R 19 H/T RF RFT 107W ••

PT 431 Explero H/T

265/50ZR 19 H/T RF 110W ••
 275/45ZR 19 H/T RF 108W ••
 275/45ZR 20 H/T RF 110W ••
 285/45R 19 H/T 107V ••
 275/40ZR 20 H/T 102W ••
 315/35ZR 20 RF*
 315/35ZR 20 RF RFT*

RF:REINFORCED

RFT: RUN FLAT

*UNDER DEVELOPMENT



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Ful silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Under tread Construction

Jointless "O" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.

Petlas

W 671 Explero

Designed for high traction and grip performance on snowy and icy surfaces. Provides stability on dry roads with special compound. Unique pattern design enables ultimate handling and cornering performance. Reduces stopping distance on slippery surfaces.



CONFIDENT TRACTION AND BRAKE PERFORMANCE ON SEVERE WINTER CONDITIONS

■ PATTERN PROPERTIES



- High performance on icy and wet surfaces with Z-shaped sipes.



- Stability on stream driving routes with circumferential block on the center.



- Low noise and high driving comfort with V-shaped grooves.



- Fast and effective water/snow discharge with three circular canals



- High maneuverability and turning performance with reinforced block type.



● ●

■ ALL SIZES

205/80R 16 RF	104T
215/80R 15	102S
235/75R 15 RF	109T
205/70R 15	96T
215/70R 15	98H
215/70R 16 RF	104H
225/70R 16 RF	107H
235/70R 16	106T
245/70R 16 RF	111T
255/70R 16	111T
265/70R 16	112T
215/65R 17 RF	99H
225/65R 17 RF	106H
235/65R 17 RF	108V
245/65R 17 RF	111H
255/65R 17 RF	114H
265/65R 17 RF	116H
215/60R 17 RF	100H
225/60R 17 RF	103V
235/60R 17 RF	106H
255/60R 17 RF	110V
225/60R 18 RF	104V
235/60R 18 RF	107H
245/60R 18 RF	105H
255/60R 18 RF	112H
235/55R 17 RF	103V

265/60R 18 RF	114H
205/55R 19 RF	97H
215/55R 18	95H
225/55R 18 RF	102H
235/55R 18 RF	104H
255/55R 18 RF	109V
225/55R 19	99H
235/55R 19 RF	105V
245/55R 19	103H
255/55R 19 RF	111V
275/55R 19	111H
235/50R 18 RF	101V
235/50R 19 RF	103V

255/50R 19 RF	107V
255/50R 19 RF RFT	107V
265/50R 20 RF	111H
245/50R 20	102V
225/45R 19 RF	96V
275/45R 20 RF	110V
285/45R 19 RF	111H
275/40R 20 RF	106V
315/35R 20 RF	110V
255/55R 18 RFT*	
275/40R 20 RFT*	
275/40R 20 RFT*	
315/35R 20*	
315/35R 20 RFT*	



W 671 Exploro

RF:REINFORCED

RFT: RUN FLAT

*UNDER DEVELOPMENT

■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Under tread
Construction

Jointless "O" degree spiral
nylon cover and wide
steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve lateral stability in high speed cornering and uniformity for
smoother ride.

Pirelli



PT 825

SUMMER



PT 825

plus
SUMMER



PT 835

SUMMER





LIGHT TRUCK TIRES

PT 875

SUMMER WINTER



PT 925

WINTER



PT 935

WINTER



PT 945
UNDER DEVELOPMENT

WINTER



PT 825 Full Power

Designed for commercial light trucks, transporters and vans. Deep treads and straight ribs provide excellent handling in any kind of weather condition. Offer durability thanks to its special compound resistant to wear and cornering safety.



DESIGNED TO DELIVER OPTIMAL
PERFORMANCE AND DURABILITY

■ PATTERN PROPERTIES



■ High performance on icy and wet surfaces with Z -shaped sipes.



■ Circumferential tiny groove on shoulder block provides even wear.



■ Computer simulated pitch frequency minimizes road / pattern noise and improves comfort for quite ride.



■ Circumferential 3-wide grooves provide excellent water drainage and improve aquaplaning significantly.



■ ALL SIZES

195R 14 C	8PR	106/104R
195R 15 C	8PR	106/104R
225/70R 15 C	8PR	112/110R
225/70R 15 C	10PR	116/114R

PT 825 Full Power



■ TECHNOLOGY & BENEFITS

High Tech Undertread
Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve lateral stability in high speed cornering and uniformity for
smoother ride.

petlas

PT 825 Full Power Plus

Radial summer tire designed with high technology. Offers high-grip performance and wear resistance thanks to its special tread compound.



OUTSTANDING GRIP PERFORMANCE IN WET AND DRY CONDITIONS

■ PATTERN PROPERTIES



- Better grip and traction on wet or dry surfaces with Z shape tread design.



- Special formulized tread composition provides ultimate grip on asphalt.



- Computer designed block array minimizes road/pattern noise, high driving comfort.



- Circumferential 3 channel provide excellent water discharge.





■ ALL SIZES

5.00R 12 C	8PR	83/81P
155R 12 C	8PR	88/86N
155R 13 C	6PR	85/83N
185R 14 C	8PR	102/100R
195R 14 C	8PR	106/104R
185R 15 C	8PR	103/102R
175/75R 16 C	8PR	101/99R
185/75R 16 C	8PR	104/102R
195/75R 16 C	8PR	107/105R
205/75R 16 C	8PR	110/108R

205/75R 16 C	10PR	113/111R
215/75R 16 C	8PR	113/111R
215/75R 16 C	10PR	116/114R
225/75R 16 C	8PR	118/116R
165/70R 14 C	6PR	89/87R
195/70R 15 C	8PR	104/102R
205/70R 15 C	8PR	106/104R
215/70R 15 C	8PR	109/107S
225/70R 15 C	8PR	112/110R
225/70R 15 C	10PR	116/114R

PT 825 Full Power Plus

205/65R 15 C	8PR	102/100T
205/65R 16 C	8PR	107/105T
215/65R 16 C	8PR	109/107R
225/65R 16 C	8PR	112/110R
235/65R 16 C	8PR	115/113R



■ TECHNOLOGY & BENEFITS

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.

petlas

PT 835 Full Power

Safe handling in all kind of situations, even under heavy loads. Wide contact area increased stability and increase driving performance. Offer excellent mileage, rolling resistance and safety in wet surfaces.



LONG LASTING PERFORMANCE,
WITH ULTIMATE WET GRIP AND
HANDLING CAPABILITY

■ PATTERN PROPERTIES



■ Better grip performance on both and dry surfaces thanks to its special tread design.



■ Center groove improves riding comfort.



■ Computer designed block array minimizes road and pattern noise.



■ Three grooves provide excellent water discharge.



■ Reinforced carcass and bead improves durability.





••



■ ALL SIZES

205/75R 16 C	8PR	110/108R
215/75R 16 C	8PR	113/111R
215/75R 16 C	10PR	116/114R
225/70R 15 C	8PR	112/110R
195/65R 16 C	8PR	104/102T
205/65R 16 C	8PR	107/105T
215/65R 15 C	6PR	104/102T
215/65R 16 C	8PR	109/107R
235/65R 16 C	8PR	115/113R
235/65R 16 C	12PR	121/119R
285/65R 16 C	10PR	128N
195/60R 16 C	6PR	99/97T

••

PT 835 Full Power



■ TECHNOLOGY & BENEFITS

High Tech Undertread
Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve lateral stability in high speed cornering and uniformity for
smoother ride.

petlas

PT 875 AdvenTe

Interlocking tread blocks offers durability. Perform high performance on dry surfaces. High wear resistance against wear with special shoulder structure. Multi-angle sipes offer all-season traction every kind of road.



MAXIMUM PERFORMANCE IN DIFFERENT WEATHER CONDITIONS

■ PATTERN PROPERTIES



- It's a special four season tire, provides high handling performance and short brake distance on icy, wet and dry surfaces.



- Thanks to its special tread mixture show outstanding grip performance on icy surfaces.



- Block array minimizes road noise and offers comfort driving.



- Effective discharge of water by three grooves tread pattern.



- Special shoulder structure provides high resistance to wear.





■ ALL SIZES

155R 12 C	8PR	88/86N	195/70R 15 C	8PR	104/102R
155R 13 C	8PR	90/89R	205/70R 15 C	8PR	106/104R
185R 14 C	8PR	102/100R	215/70R 15 C	8PR	109/107R
195R 14 C	8PR	106/104R	225/70R 15 C	8PR	112/110R
185/75R 16 C	8PR	104/102R	205/65R 15 C	8PR	102/100T
195/75R 16 C	8PR	107/105R	205/65R 16 C	8PR	107/105T
205/75R 16 C	8PR	110/108R	215/65R 16 C	8PR	109/107R
215/75R 16 C	8PR	113/111R	225/65R 16 C	8PR	112/110R
225/75R 16 C	8PR	118/116R	235/65R 16 C	8PR	115/113R

PT 875 Adven



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Fine silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "O" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.

PT 925 Full Grip

Designed to overcome winter challenges. Offers excellent traction in difficult conditions thanks to its V shaped special tread pattern design.



EXCELLENT GRIP CAPABILITY WITH LONG LASTING PERFORMANCE

■ PATTERN PROPERTIES



- Optimized shoulder width increases foot print pressure resulting in higher traction and grip on snow and ice.



- Multi sipes improve handling and braking performance on snow and ice.



- Computer simulated pitch frequency minimizes road/pattern noise improving comfort for quieter ride.



- Stiff shoulder blocks improve cornering and maneuverability at high speeds and ensure even wear on shoulder.



- Sharp edges on shoulder improve cornering.



- Wide circumferential grooves provide exceptional water drainage and boost aquaplaning performance.



■ ALL SIZES

155R 12 C	8PR	88/86N	195/70R 15 C	8PR	104/102R
155R 13 C	6PR	85/83N	205/70R 15 C	8PR	106/104R
185R 14 C	8PR	102/100R	215/70R 15 C	8PR	109/107R
195R 14 C	8PR	106/104R	225/70R 15 C	8PR	112/110R
175/75R 16 C	8PR	101/99R	205/65R 15 C	8PR	102/100T
185/75R 16 C	8PR	104/102R	205/65R 16 C	8PR	107/105T
195/75R 16 C	8PR	107/105R	215/65R 16 C	8PR	109/107R
205/75R 16 C	8PR	110/108R	225/65R 16 C	8PR	112/110R
215/75R 16 C	8PR	113/111R	235/65R 16 C	8PR	115/113R
225/75R 16 C	8PR	118/116R	195/60R 16 C	6PR	99/97T

PT 925 Full Grip



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "O" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.

PT 935 Full Grip

Unique tread design with wavy sipes enables high grip performance on icy surfaces. Offers safety and durability.



EXCEPTIONAL TRACTION AND BRAKE PERFORMANCE IN HARSH WINTER CONDITIONS

■ PATTERN PROPERTIES



- Optimized shoulder width increases foot print pressure resulting in higher traction and grip on snow and ice.



- Multi sipes improve handling and braking performance on snow and ice.



- Computer simulated pitch frequency minimizes road/pattern noise improving comfort for quite ride.



- Stiff shoulder blocks improve cornering and maneuvers even at high speeds and ensure even wear on shoulders.



- Wide circumferential and lateral grooves provide exceptional water drainage ant boost aquaplaning performance.





■ ALL SIZES

155R 12 C	8PR	88/86N
155R 13 C	6PR	85/83N
185R 14 C	8PR	102/100R
195R 14 C	8PR	106/104R
185/75R 16 C	8PR	104/102R
195/75R 16 C	8PR	107/105R
205/75R 16 C	10PR	113/111R
215/75R 16 C	10PR	116/114R
225/75R 16 C	8PR	118/116R
195/70R 15 C	8PR	104/102R

205/70R 15 C	8PR	106/104R
225/70R 15 C	8PR	112/110R
215/65R 15 C	6PR	104/102T
195/65R 16 C	8PR	104/102T
205/65R 16 C	8PR	107/105T
215/65R 16 C	8PR	109/107R
225/65R 16 C	8PR	112/110R
235/65R 16 C	10PR	121/119R
285/65R 16 C	10PR	128 N
195/60R 16 C	6PR	99/97T

PT 935 Full Grip



■ TECHNOLOGY & BENEFITS

High Tech
Under tread
Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

It improves uniformity for smoother ride, durability and
lower rate of tread wear.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve lateral stability in high speed cornering and
uniformity for smoother ride.

petlas

PT 945 Full Grip

Unique pattern design with multidirectional wavy sipes and tread compound delivers exceptional performance in winter conditions and on the wet roads. 3PMSF and M+S markings on that tire ensure better grip and braking on snowy roads. Three circumferential grooves offer effective discharge of water and reduce aquaplaning.



DESIGNED FOR ULTIMATE PERFORMANCE IN MILD-WINTER CONDITIONS

PATTERN PROPERTIES



- Optimised shoulder width increases foot print pressure resulting in higher traction and grip on snow and ice.



- Multi sipes and block type tread pattern improve grip and breaking performance on snow and ice.



- Computer simulated pitch frequency minimizes road/pattern noise improving comfort for quieter ride.



- Stiff shoulder blocks improve cornering and maneuvers even at high speeds and ensure even wear on shoulders.



- Wide grooves provide exceptional water drainage and boost aquaplaning performance.





■ UNDER DEVELOPMENT SIZES

215/75R 16 C

235/65R 16 C

PT 945 Full Grip



■ TECHNOLOGY & BENEFITS

High Tech
Under tread
Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

It improves uniformity for smoother ride, durability and
lower rate of tread wear.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve lateral stability in high speed cornering and
uniformity for smoother ride.

petlas

PT 311 ELEGANT

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	Inflated Pressure (Psi/Bar)
155/80R 12	77	T	412	190	35
145/70R 12	69	T	325	190	36
155/70R 12	73	T	365	190	36
165/70R 12	77	T	412	190	36
175/70R 12	80	T	450	190	36
155/80R 13	79	T	437	190	35
165/80R 13	83	T	487	190	35
165/80R 13 RF	87	R	545	170	41
145/70R 13	71	T	345	190	36
155/70R 13	75	T	387	190	36
165/70R 13	79	T	437	190	36
165/70R 13 RF	83	T	487	190	42
175/70R 13	82	T	475	190	36
185/70R 13	86	T	530	190	36
155/65R 13	73	T	365	190	36
165/65R 13	77	T	412	190	36
175/65R 13	80	T	450	190	36
175/80R 14	88	T	560	190	35
165/70R 14	81	T	462	190	36
165/70R 14 RF	85	R	515	170	42
175/70R 14	84	T	500	190	36
175/70R 14 RF	88	T	560	190	42
185/70R 14	88	T	560	190	36
195/70R 14	91	T	615	190	36
155/65R 14	75	T	387	190	36
165/65R 14	79	T	437	190	36
175/65R 14	82	T	475	190	36
175/65R 14	86	T	530	190	42
185/65R 14	86	T	530	190	36
195/65R 14	89	H	580	210	36
165/60R 14	75	T	387	190	36
165/80R 15	87	T	545	190	35
195/70R 15 RF	97	T	730	190	42
175/65R 15	84	T	500	190	36
185/65R 15	88	T	560	190	36
195/65R 15 RF	95	T	690	190	42
195/65R 15	91	T	615	190	36

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)	F	C	DB	dB
4,50B	4,00B, 5,00B	156	554	F	C	69	2
4,50B	3,50B, 4,00B, 5,00B	145	512	F	C	69	2
4,50B	4,00B, 5,00B	156	526	F	C	69	2
5,00B	4,00B, 4,50B, 5,50B	169	539	F	C	69	2
5,00B	4,50B, 5,50B, 6,00B	177	555	E	C	69	2
4,50B, 4½J	4,00B, 4J, 5,00B, 5J	156	580	F	C	69	2
4,50B, 4½J	4,00B, 4J, 5,00B, 5J, 5,50B, 5½J	166	595	E	C	69	2
4,50B, 4½J	4,00B, 4J, 5,00B, 5J, 5,50B, 5½J	166	595	E	C	69	2
4,50B, 4½J	3,50B, 3½J, 4,00B, 4J, 5,00B, 5J	146	539	F	C	69	2
4,50B, 4½J	4,00B, 4J, 5,00B, 5J	155	554	F	C	69	2
5,00B, 5J	4,00B, 4J, 4,50B, 4½J, 5,50B, 5½J	168	565	F	C	69	2
5,00B, 5J	4,00B, 4J, 4,50B, 4½J, 5,50B, 5½J	168	565	E	C	69	2
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	177	582	E	C	69	2
5,50B, 5½J	4,50B, 4½J, 5,00B, 5J, 6,00B, 6J	189	592	E	C	69	2
4,50B, 4½J	5,00B, 5J, 5,50B, 5½J	154	534	F	C	69	2
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	170	550	F	C	69	2
5,00B, 5J	5,50B, 5½J, 6,00B, 6J	175	560	E	C	69	2
5J	4½J, 5½J, 6J	177	637	E	C	69	2
5,00B, 5J	4J, 4,50B, 4½J, 5,50B, 5½J	168	590	E	C	69	2
5,00B, 5J	4J, 4,50B, 4½J, 5,50B, 5½J	168	590	E	C	69	2
5,00B, 5J	4½J, 5,50B, 5½J, 6J	177	605	E	C	69	2
5,00B, 5J	4½J, 5,50B, 5½J, 6J	177	605	E	C	69	2
5½J	4½J, 5J, 6J	193	618	E	C	69	2
6J	5J, 5½J, 6½J	201	630	E	C	69	2
4,50B, 4½J	5,00B, 5J, 5,50B, 5½J	155	561	F	C	69	2
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6J	170	577	E	C	69	2
5,00B, 5J	5,50B, 5½J, 6J	174	586	E	C	69	2
5,00B, 5J	5,50B, 5½J, 6J	174	586	E	C	69	2
5½J	5J, 6J, 6½J	189	602	E	C	69	2
6J	5½J, 6½J, 7J	200	613	E	C	69	2
5,00B, 5J	4½J, 5½J, 6J	169	558	F	C	69	2
4½J	4J, 5J, 5½J	165	646	E	C	69	2
6J	5J, 5½J, 6½J	203	658	C	C	69	2
5J	5½J, 6J	175	610	E	C	69	2
5½J	5J, 6J, 6½J	189	627	E	C	69	2
6J	5½J, 6½J, 7J	200	641	E	C	69	2
6J	5½J, 6½J, 7J	201	641	E	C	69	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



Petlas

PT 515 IMPERIUM

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	Inflated Pressure (Psi/Bar)
175/60R 13	77	H	412	210	36
175/70R 13	82	T	475	190	36
175/70R 13	82	H	475	210	36
185/70R 14	88	H	560	210	36
175/70R 14	84	H	500	210	36
175/70R 14 RF	88	H	560	210	42
175/65R 14	82	H	475	210	36
175/65R 14 RF	86	T	530	190	42
185/65R 14	86	H	530	210	36
185/60R 14	82	H	475	210	36
195/60R 14	86	H	530	210	36
185/60R 14	82	H	475	210	36
195/60R 14	86	H	530	210	36
175/65R 15	84	H	500	210	36
185/65R 15	88	H	560	210	36
185/65R 15 RF	92	H	630	210	42
195/65R 15	91	H	615	210	36
195/65R 15	91	V	615	240	36
195/65R 15 RF	95	H	690	210	42
205/65R 15	94	H	670	210	36
205/65R 15	94	V	670	240	36
205/65R 15 RF	99	H	775	210	42
215/65R 15	96	V	710	240	36
185/60R 15	84	H	500	210	36
185/60R 15 RF	88	H	560	210	42
195/60R 15	88	H	560	210	36
195/60R 15	88	V	560	240	36
205/60R 15	91	H	615	210	36
205/60R 15	91	V	615	240	36
185/55R 15	82	V	475	240	36
195/55R 15	85	V	515	240	36
205/55R 15	88	V	560	240	36
195/50R 15*	82	V	475	240	36
205/50R 15*	86	W	530	270	36
205/65R 16	95	H	690	210	36
215/65R 16	98	H	750	210	36
215/65R 16	98	V	750	240	36
205/60R 16	92	H	630	210	36
205/60R 16	92	V	630	240	36
195/55R 16	87	V	545	240	36
205/55R 16	91	H	615	210	36
205/55R 16	91	V	615	240	36
215/55R 16	93	H	650	210	36
215/55R 16	93	V	650	240	36
225/55ZR 16	95	W	690	270	36
205/50ZR 16*	87	W	545	270	36
225/55ZR 17*	97	W	730	270	36
205/50ZR 17 RF*	93	W	650	270	42
225/50ZR 17 RF*	98	W	750	270	42
215/45ZR 17 RF*	91	W	615	270	42
225/45ZR 17 RF*	94	W	670	270	42

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5J	5.00B, 5.50B, 5½J, 6.00B, 6J	174	541,5	E	B	70	2
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	179	578	E	B	70	2
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	179	578	E	B	70	2
5½J	4½J, 5J, 6J	189	616	E	B	70	2
5,00B, 5J	4½J, 5,50B, 5½J, 6J	178	605	E	B	70	2
5,00B, 5J	4½J, 5,50B, 5½J, 6J	178	605	E	B	70	2
5,00B, 5J	5,50B, 5½J, 6J	177	589	E	B	70	2
5,00B, 5J	5,50B, 5½J, 6J	177	589	E	B	70	2
5½J	5J, 6J, 6½J	190	600	E	B	70	2
5½J	5J, 6J, 6½J	189	582	E	B	70	2
6J	5½J, 6½J, 7J	200	593	E	B	71	2
5½J	5J, 6J, 6½J	189	582	E	B	70	2
6J	5½J, 6½J, 7J	200	593	E	B	71	2
5J	5½J, 6J	177	615	E	B	70	2
5½J	5J, 6J, 6½J	189	625	E	B	70	2
5½J	5J, 6J, 6½J	189	625	C	B	70	2
6J	5½J, 6½J, 7J	201	638	C	B	71	2
6J	5½J, 6½J, 7J	201	638	C	B	71	2
6J	5½J, 6½J, 7J, 7½J	201	638	C	B	71	2
6J	5½J, 6½J, 7J, 7½J	210	650	C	B	71	2
6J	5½J, 6½J, 7J, 7½J	210	650	C	B	71	2
6J	5½J, 6½J, 7J, 7½J	210	650	C	B	71	2
6½J	6J, 7J, 7½J	221	662	C	B	71	2
5½J	5J, 6J, 6½J	189	609	E	B	70	2
5½J	5J, 6J, 6½J	189	609	E	B	70	2
6J	5½J, 6½J, 7J	198	622	E	B	71	2
6J	5½J, 6½J, 7J	198	622	E	B	71	2
6J	5½J, 6½J, 7J, 7½J	209	630	C	B	71	2
6J	5½J, 6½J, 7J, 7½J	209	630	C	B	71	2
6J	5J, 5½J, 6½J	192	592	E	B	70	2
6J	5½J, 6½J, 7J	197	598	E	B	71	2
6½J	5½J, 6J, 7J, 7½J	216	609	C	B	71	2
6J	5½J, 6½J, 7J	195	581	E	B	71	2
6½J	5½J, 6J, 7J, 7½J	211	589	E	B	71	2
6J	5½J, 6½J, 7J, 7½J	209	675	C	B	71	2
6½J	6J, 7J, 7½J	223	688	C	B	71	2
6½J	6J, 7J, 7½J	223	688	C	B	71	2
6J	5½J, 6½J, 7J, 7½J	210	655	C	B	71	2
6J	5½J, 6½J, 7J, 7½J	210	655	C	B	71	2
6J	5½J, 6½J, 7J	199	625	E	B	71	2
6½J	5½J, 6J, 7J, 7½J	213	636	C	B	71	2
6½J	5½J, 6J, 7J, 7½J	213	636	C	B	71	2
7J	6J, 6½J, 7½J	226	642	C	B	71	2
7J	6J, 6½J, 7½J	226	642	C	B	71	2
7J	6J, 6½J, 7½J, 8J	230	660	C	B	71	2
6½J	5½J, 6J, 7J, 7½J	210	617	E	B	71	2
7J	6J, 6½J, 7½J, 8J	226	690	C	B	71	2
6½J	5½J, 6J, 7J, 7½J	214	638	C	B	71	2
7J	6J, 6½J, 7½J, 8J	223	666	C	B	71	2
7J	7½J, 8J	206	632	C	B	71	2
7½J	7J, 8J, 8½J	225	642	C	B	71	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



petlas

PT 525 PROGREEN

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
175/70R 14	84	T	500	190	36
175/70R 14 RF	88	T	560	190	42
185/70R 14	88	T	560	190	36
175/65R 14	82	T	475	190	36
175/65R 14 RF	86	T	530	190	42
185/65R 14	86	T	530	190	36
185/60R 14	82	H	475	210	36
185/55R 14*	80	H	450	210	36
185/65R 15	88	T	560	190	36
185/65R 15	88	H	560	210	36
185/65R 15 RF	92	H	630	210	42
195/65R 15	91	T	615	190	36
195/65R 15	91	H	615	210	36
195/65R 15	91	V	615	240	36
195/65R 15 RF	95	T	690	190	42
205/65R 15	94	H	670	210	36
185/60R 15	84	H	500	210	36
185/60R 15 RF	88	H	560	210	42
195/60R 15	88	H	560	210	36
185/55R 15*	82	V	475	240	36
195/55R 15*	85	H	515	210	36
195/50R 15*	82	H	475	210	36
205/60R 16	92	H	630	210	36
205/60R 16	92	V	630	240	36
215/60R 16	95	V	690	240	36
195/55R 16*	87	H	545	210	36
205/55R 16*	91	H	615	210	36
195/50R 16 RF*	88	V	560	240	42

*Sizes with rim guard

PT 535 IMPERIUM

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
175/70R 14*	84	H	500	210	36
175/65R 14	82	H	475	210	36
185/65R 14	86	H	530	210	36
195/65R 15 RF	95	H	690	210	42
185/65R 15	88	H	560	210	36
185/65R 15 RF	92	H	630	210	42
195/65R 15*	91	H	615	210	36
185/60R 15*	84	H	500	210	36
185/60R 15 RF	88	H	560	210	42
195/60R 15*	88	H	560	210	36
195/55R 16*	87	H	545	210	36
205/55R 16*	91	H	615	210	36
195/50R 16*	84	H	500	210	36

*Size with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5,00B, 5J	4½J, 5,50B, 5½J, 6J	178	599,5	C	C	69	2
5,00B, 5J	4½J, 5,50B, 5½J, 6J	178	599,5	C	C	69	2
5½J	4½J, 5J, 6J	192	613	C	C	69	2
5,00B, 5J	5,50B, 5½J, 6J	179	582	C	C	69	2
5,00B, 5J	5,50B, 5½J, 6J	179	582	C	C	69	2
5½J	5J, 6J, 6½J	190	596	C	C	69	2
5½J	5J, 6J, 6½J	186	574	C	C	69	2
6J	5J, 5½J, 6½J	193	556	C	C	69	2
5½J	5J, 6J, 6½J	190	620	C	C	69	2
5½J	5J, 6J, 6½J	190	620	C	C	69	2
5½J	5J, 6J, 6½J	190	620	C	C	69	2
6J	5½J, 6½J, 7J	206	633	C	C	69	2
6J	5½J, 6½J, 7J	206	633	C	C	69	2
6J	5½J, 6½J, 7J	206	633	C	C	69	2
6J	5½J, 6½J, 7J	206	633	C	C	70	2
6J	5½J, 6½J, 7J, 7½J	206	646	C	B	70	2
5½J	5J, 6J, 6½J	184	603,5	C	C	69	2
5½J	5J, 6J, 6½J	184	603,5	C	C	69	2
6J	5½J, 6½J, 7J	201	615	C	B	69	2
6J	5J, 5½J, 6½J	193	582	C	C	69	2
6J	5½J, 6½J, 7J	200	593	C	B	69	2
6J	5½J, 6½J, 7J	200	573	C	B	69	2
6J	5½J, 6½J, 7J, 7½J	204	650	C	B	70	2
6J	5½J, 6½J, 7J, 7½J	204	650	C	B	70	2
6½J	6J, 7J, 7½J	221	663	C	B	70	2
6J	5½J, 6½J, 7J	200	618	C	B	69	2
6½J	5½J, 6J, 7J, 7½J	214	632	C	B	70	2
6J	5½J, 6½J, 7J	200	598	C	B	69	2



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5,00B, 5J	4½J, 5,50B, 5½J, 6J	177	602	E	B	70	2
5,00B, 5J	5,50B, 5½J, 6J	177	584	E	B	70	2
5½J	5J, 6J, 6½J	193	596	E	B	70	2
6J	5½J, 6½J, 7J	201	635	E	B	71	2
5½J	5J, 6J, 6½J	190	623	E	B	70	2
5½J	5J, 6J, 6½J	190	623	E	B	70	2
6J	5½J, 6½J, 7J	201	635	E	B	71	2
5½J	5J, 6J, 6½J	189	603	E	B	70	2
5½J	5J, 6J, 6½J	189	603	E	B	70	2
6J	5½J, 6½J, 7J	200	613	E	B	71	2
6J	5½J, 6½J, 7J	197	621	E	B	71	2
6½J	5½J, 6J, 7J, 7½J	214	632	E	B	71	2
6J	5½J, 6½J, 7J	198	602	E	B	71	2



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

Petlas

PT 711 VELOX SPORT

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
185/60R 13*	80	H	450	210	36
185/60R 13*	80	V	450	240	36
185/55R 14*	80	H	450	210	36
185/55R 14*	80	V	450	240	36
195/45R 14*	77	V	412	240	36
185/55R 15*	82	H	475	210	36
185/55R 15*	82	V	475	240	36
195/55R 15*	85	V	515	240	36
205/55R 15*	88	V	560	240	36
195/50R 15*	82	V	475	240	36
205/50ZR 15*	86	W	530	270	36
195/45R 15*	78	V	425	240	36
205/45R 15*	81	V	462	240	36
195/55R 16*	87	V	545	240	36
205/55R 16*	91	V	615	240	36
205/55ZR 16 RF*	94	W	670	270	42
215/55ZR 16 RF*	97	W	730	270	42
225/55R 16*	95	V	690	240	36
195/50R 16*	84	V	500	240	36
205/50ZR 16 RF*	91	W	615	270	42
225/50ZR 16 RF*	96	W	710	270	42
195/45R 16*	80	V	450	240	36
205/45ZR 16 RF*	87	W	545	270	42
205/40ZR 16 RF*	83	W	487	270	42
215/40ZR 16 RF*	86	W	530	270	42
225/40ZR 16*	85	W	515	270	36
225/55ZR 17*	97	W	730	270	36
205/50ZR 17 RF*	93	W	650	270	42
215/50ZR 17*	91	W	615	270	36
225/50ZR 17 RF*	98	W	750	270	42
205/45ZR 17 RF*	88	W	560	270	42
215/45ZR 17 RF*	91	W	615	270	42
225/45ZR 17 RF*	94	W	670	270	42
245/45ZR 17 RF*	99	W	775	270	42
205/40ZR 17 RF*	84	W	500	270	42
215/40ZR 17 RF*	87	W	545	270	42
235/40ZR 17 RF*	94	W	670	270	42
245/40ZR 17 RF*	95	W	690	270	42
225/45ZR 18 RF*	95	W	690	270	42
245/45ZR 18 RF*	100	W	800	270	42
215/40ZR 18 RF*	89	W	580	270	42
225/40ZR 18 RF*	92	W	630	270	42
235/40ZR 18 RF*	95	W	690	270	42
245/40ZR 18 RF*	93	W	650	270	36
215/35ZR 18 RF*	84	W	500	270	42
225/35ZR 18 RF*	87	W	545	270	42
225/40ZR 19*	89	W	580	270	36
245/40ZR 19 RF*	98	W	750	270	42
255/40ZR 19 RF*	100	W	800	270	42
225/35ZR 19 RF*	88	W	560	270	42

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures,please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue , without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5,50B, 5½J	5,00B, 5J, 6,00B, 6J, 6½J	188	554	E	C	70	2
5,50B, 5½J	5,00B, 5J, 6,00B, 6J, 6½J	188	554	E	C	70	2
6J	5J, 5½J, 6½J	194	562	E	C	70	2
6J	5J, 5½J, 6½J	194	562	E	C	70	2
6½J	6J, 7J, 7½J	198	533	E	C	71	2
6J	5J, 5½J, 6½J	194	591	E	C	70	2
6J	5J, 5½J, 6½J	194	591	E	C	70	2
6J	5½J, 6½J, 7J	201	599	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	210	614	E	C	71	2
6J	5½J, 6½J, 7J	197	581	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	213	590	E	C	71	2
6½J	6J, 7J, 7½J	196	562	E	C	71	2
7J	6½J, 7½J	207	568	E	C	71	2
6J	5½J, 6½J, 7J	199	625	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	211	640	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	211	640	C	C	71	2
7J	6J, 6½J, 7½J	225	647	C	C	71	2
7J	6J, 6½J, 7½J, 8J	228	658	C	C	71	2
6J	5½J, 6½J, 7J	197	611	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	210	617	E	C	71	2
7J	6J, 6½J, 7½J, 8J	230	636	C	C	71	2
6½J	6J, 7J, 7½J	196	588	E	C	71	2
7J	6½J, 7½J	205	596	E	C	71	2
7½J	7J, 8J	204	576	E	C	71	2
7½J	7J, 8J, 8½J	204	582	E	C	71	2
8J	7½J, 8½J, 9J	230	588	E	C	71	2
7J	6J, 6½J, 7½J, 8J	227	685	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	210	644	E	C	71	2
7J	6J, 6½J, 7½J	217	656	E	C	71	2
7J	6J, 6½J, 7½J, 8J	228	665	C	C	71	2
7J	6½J, 7½J	204	624	E	C	71	2
7J	7½J, 8J	210	636	E	C	71	2
7½J	7J, 8J, 8½J	227	638	C	C	71	2
8J	7½J, 8½J, 9J	235	655	C	B	71	2
7½J	7J, 8J	210	601	E	C	71	2
7½J	7J, 8J, 8½J	208	609	E	C	71	2
8½J	8J, 9J, 9½J	236	627	C	B	71	2
8½J	8J, 9J, 9½J	241	635	C	B	71	2
7½J	7J, 8J, 8½J	225	666	C	C	71	2
8J	7½J, 8½J, 9J	235	683	C	B	71	2
7½J	7J, 8J, 8½J	210	638	E	C	71	2
8J	7½J, 8½J, 9J	226	645	E	C	71	2
8½J	8J, 9J, 9½J	233	653	C	B	71	2
8½J	8J, 9J, 9½J	244	662	E	B	71	2
7½J	7J, 8J, 8½J	218	615	E	C	71	2
8J	7½J, 8½J, 9J	222	624	E	C	71	2
8J	7½J, 8½J, 9J	226	670	E	C	71	2
8½J	8J, 9J, 9½J	245	687	C	B	71	2
9J	8½J, 9½J, 10J	256	695	C	B	71	2
8J	7½J, 8½J, 9J	220	649	E	C	71	2



petlas

PT 721 VELOX SPORT

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
205/55R 16*	91	V	615	240	36

*Sizes with rim guard

PT 731 VELOX SPORT

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
205/55R 16*	91	H	615	210	36
205/55R 16*	91	V	615	240	36

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures,please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue , without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIAMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6½J	5½J, 6J, 7J, 7½J	214	639	C	B	69	2



RIM		INFLATED DIEMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6½J	5½J, 6J, 7J, 7½J	214	638	C	B	70	2
6½J	5½J, 6J, 7J, 7½J	214	638	C	B	70	2



Description

*For load capacity on various speeds, and inflation figures,please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue , without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

PT 741 VELOX SPORT

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
185/55 R14*	80	V	450	240	36
185/55 R15*	82	V	475	240	36
195/55 R15*	85	V	515	240	36
195/50 R15*	82	V	475	240	36
205/50 ZR15*	86	W	530	270	36
215/60 R16 RF	99	V	775	240	42
225/60 R16	98	V	750	240	36
235/60 ZR16*	100	W	800	270	36
185/55 R16 RF*	87	H	545	210	42
195/55 R16 RFT*	87	V	545	240	36
195/55 R16*	87	V	545	240	36
205/55 R16 RFT*	91	V	615	240	36
205/55 ZR16 RF*	94	W	670	270	42
215/55 ZR16 RF*	97	W	730	270	42
225/55 ZR16 RF*	99	W	775	270	42
195/50 R16*	84	V	500	240	36
205/50 ZR16 RF*	91	W	615	270	42
225/50 ZR16 RF*	96	W	710	270	42
195/45 R16 RF*	84	V	500	240	42
205/45 ZR16 RF*	87	W	545	270	42
215/45 R16 RF*	90	V	600	240	42
205/40 ZR16 RF*	83	W	487	270	42
215/40 ZR16 RF*	86	W	530	270	42
205/55 ZR17*	91	W	615	270	36
215/55 ZR17 RF*	98	W	750	270	42
225/55 ZR17 RFT*	97	W	730	270	36
225/55 ZR17 RF*	101	W	825	270	42
235/55 ZR17 RF*	103	W	875	270	42
205/50 ZR17 RFT*	89	W	580	270	36
205/50 ZR17 RF*	93	W	650	270	42
215/50 ZR17 RF*	95	W	690	270	42
225/50 ZR17 RFT*	94	W	670	270	36
225/50 ZR17 RF*	98	W	750	270	42
205/45 ZR17 RF*	88	W	560	270	42
215/45 ZR17 RF*	91	W	615	270	42
225/45 ZR17 RF*	94	W	670	270	42
225/45 ZR17 RFT*	91	W	615	270	36
235/45 ZR17 RF*	97	W	730	270	42
245/45 ZR17 RF*	99	W	775	270	42
205/40 ZR17 RF*	84	W	500	270	42
215/40 ZR17 RF*	87	W	545	270	42
235/40 ZR17 RF*	94	W	670	270	42
245/40 ZR17 RF*	95	W	690	270	42
245/35 ZR17*	87	W	545	270	36
235/55 ZR18 RF*	104	W	900	270	42
235/50 ZR18 RF*	101	W	825	270	42
245/50 ZR18*	100	W	800	270	36
245/50 RF18 RFT*	100	W	800	270	36
215/45 ZR18 RF*	93	W	650	270	42

*Size with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



RIM		INFLATED DIAMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6J	5J, 5½J, 6½J	193	563	E	C	70	2
6J	5J, 5½J, 6½J	194	585	E	C	70	2
6J	5½J, 6½J, 7J	200	595	E	C	71	2
6J	5½J, 6½J, 7J	196	582	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	587	E	C	71	2
6½J	6J, 7J, 7½J	225	665	C	B	71	2
6½J	6J, 7J, 7½J, 8J	233	677	C	B	71	2
7J	6½J, 7½J, 8J, 8½J	240	690	C	B	71	2
6J	5J, 5½J, 6½J	191	610	E	C	70	2
6J	5½J, 6½J, 7J	201	620	E	C	71	2
6J	5½J, 6½J, 7J	201	620	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	635	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	632	E	C	71	2
7J	6J, 6½J, 7½J	228	642	C	B	71	2
7J	6J, 6½J, 7½J, 8J	233	654	C	B	71	2
6J	5½J, 6½J, 7J	195	608	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	612	E	C	71	2
7J	6J, 6½J, 7½J, 8J	233	632	C	B	71	2
6½J	6J, 7J, 7½J	195	582	E	C	71	2
7J	6½J, 7½J	206	596	E	C	71	2
7J	7½J, 8J	215	600	E	B	71	2
7½J	7J, 8J	212	570	E	C	71	2
7½J	7J, 8J, 8½J	218	580	E	B	71	2
6½J	5½J, 6J, 7J, 7½J	213	658	E	C	71	2
7J	6J, 6½J, 7½J	226	668	C	B	71	2
7J	6J, 6½J, 7½J, 8J	233	680	E	B	71	2
7J	6J, 6½J, 7½J, 8J	228	688	C	B	71	2
7½J	6½J, 7J, 8J, 8½J	246	692	C	B	71	2
6½J	5½J, 6J, 7J, 7½J	210	640	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	638	C	C	71	2
7J	6J, 6½J, 7½J	226	648	C	B	71	2
7J	6J, 6½J, 7½J, 8J	233	658	E	B	71	2
7J	6J, 6½J, 7½J, 8J	233	658	C	B	71	2
7J	6½J, 7½J	206	623	E	C	71	2
7J	7½J, 8J	211	627	C	B	71	2
7½J	7J, 8J, 8½J	222	642	E	B	71	2
7½J	7J, 8J, 8½J	226	636	E	B	71	2
8J	7½J, 8½J, 9J	236	650	C	B	71	2
8J	7½J, 8½J, 9J	243	652	C	B	71	2
7½J	7J, 8J	216	601	E	C	71	2
7½J	7J, 8J, 8½J	218	608	E	B	71	2
8½J	8J, 9J, 9½J	241	622	E	B	71	2
8½J	8J, 9J, 9½J	246	635	E	B	71	2
8½J	8J, 9J, 9½J	243	608	E	B	71	2
7½J	6½J, 7J, 8J, 8½J	246	718	C	B	71	2
7½J	6½J, 7J, 8J, 8½J	245	693	C	B	71	2
7½J	7J, 8J, 8½J	245	708	E	B	71	2
7½J	7J, 8J, 8½J	245	708	E	B	71	2
7J	7½J, 8J	213	655	C	B	71	2

SEE NEXT PAGE FOR THE REST OF SIZES ►

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

Petlas

PT 741 VELOX SPORT

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
225/45 ZR18 RFT*	91	W	615	270	36
225/45 ZR18 RF*	95	W	690	270	42
235/45 ZR18 RF*	98	W	750	270	42
245/45 ZR18 RFT*	96	W	710	270	36
245/45 ZR18 RF*	100	W	800	270	42
255/45 ZR18 RF*	103	W	875	270	42
275/45 ZR18 RF*	107	W	975	270	42
215/40 ZR18 RF*	89	W	580	270	42
225/40 ZR18 RF*	92	W	630	270	42
235/40 ZR18 RF*	95	W	690	270	42
245/40 ZR18 RFT*	93	W	650	270	36
245/40 ZR18*	93	W	650	270	36
255/40 ZR18*	95	W	690	270	36
215/35 ZR18 RF*	84	W	500	270	42
225/35 ZR18 RF*	87	W	545	270	42
245/35 ZR18 RF*	92	W	630	270	42
255/35 ZR18 RF*	94	W	670	270	42
265/35 ZR18 RF*	97	W	730	270	42
275/35 ZR18 RF*	99	W	775	270	42
275/40 ZR18 RF*	103	Y	875	300	42
225/45 ZR19 RF*	96	W	710	270	42
235/45 ZR19 RF*	99	W	775	270	42
245/45 ZR19 RFT*	98	W	750	270	36
245/45 ZR19 RF*	102	W	850	270	42
255/45 ZR19 RF*	104	Y	900	300	42
225/40 ZR19 RF*	93	W	650	270	42
245/40 ZR19 RF*	98	W	750	270	42
245/40 ZR19 RFT*	94	W	670	270	36
255/40 ZR19 RF*	100	W	800	270	42
265/40 ZR19 RF*	102	W	850	270	42
275/40 ZR19 RF*	105	Y	925	300	42
285/40 ZR19 RF*	107	W	975	270	42
215/35 ZR19 RF*	85	W	515	270	42
235/35 ZR19 RF*	91	W	615	270	42
245/35 ZR19 RF*	93	W	650	270	42
255/35 ZR19 RF*	96	W	710	270	42
255/35 RF19 RFT*	92	W	630	270	36
275/35 ZR19 RF*	100	W	800	270	42
265/30 ZR19 RF*	93	W	650	270	42
275/30 ZR19 RF*	96	W	710	270	42
245/40 ZR20 RF*	99	W	775	270	42
255/40 ZR20 RF*	101	W	825	270	42
245/35 ZR20 RF*	95	W	690	270	42
255/35 ZR20 RF*	97	W	730	270	42
275/30 ZR20 RF*	97	W	730	270	42

*Size with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIAMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
7½J	7J, 8J, 8½J	226	660	E	B	71	2
7½J	7J, 8J, 8½J	225	659	E	B	71	2
8J	7½J, 8½J, 9J	236	669	C	B	71	2
8J	7½J, 8½J, 9J	243	677	E	B	71	2
8J	7½J, 8½J, 9J	243	677	C	B	71	2
8½J	8J, 9J, 9½J	257	692	C	B	72	2
9J	8½J, 9½J, 10J, 10½J	269,8	705,6	C	B	73	2
7½J	7J, 8J, 8½J	217	633	E	B	71	2
8J	7½J, 8½J, 9J	230	637	E	B	71	2
8½J	8J, 9J, 9½J	241	645	E	B	71	2
8½J	8J, 9J, 9½J	245	662	E	B	71	2
8½J	8J, 9J, 9½J	244	660	E	B	71	2
9J	8½J, 9½J, 10J	257	660	E	B	72	2
7½J	7J, 8J, 8½J	216	613	E	B	71	2
8J	7½J, 8½J, 9J	227	625	E	B	71	2
8½J	8J, 9J, 9½J	242	636	E	B	71	2
9J	8½J, 9½J, 10J	253	639	E	B	72	2
9½J	9J, 10J, 10½J	268	647	C	B	72	2
9½J	9J, 10J, 10½J, 11J	270	656	E	B	72	2
9½J	9J, 10J, 10½J, 11J	283,2	673,5	C	B	73	2
7½J	7J, 8J, 8½J	225	693	E	B	71	2
8J	7½J, 8½J, 9J	238	694	E	B	71	2
8J	7½J, 8½J, 9J	243	703	E	B	71	2
8J	7½J, 8½J, 9J	243	703	C	B	71	2
8½J	8J, 9J, 9½J	257	718	C	B	72	2
8J	7½J, 8½J, 9J	230	663	C	B	71	2
8½J	8J, 9J, 9½J	248	683	E	B	71	2
8½J	8J, 9J, 9½J	248	682	E	B	71	2
9J	8½J, 9½J, 10J	258	692	C	B	72	2
9½J	9J, 10J, 10½J	274,8	690	E	B	73	2
9½J	9J, 10J, 10½J, 11J	283	697	C	B	73	2
10J	9½J, 10½J, 11J	291,4	707,9	C	B	74	2
7½J	7J, 8J, 8½J	217	640	E	B	71	2
8J	8½J, 9J, 9½J	236	654	E	B	71	2
8½J	8J, 9J, 9½J	241	662	E	B	71	2
9J	8½J, 9½J, 10J	253	665	E	B	72	2
9J	8½J, 9½J, 10J	254	664	E	B	72	2
9½J	9J, 10J, 10½J, 11J	268	682	E	B	73	2
9½J	9J, 10J	266,2	645,8	E	B	73	2
9½J	9J, 10J	270,2	649,3	E	B	73	2
8½J	8J, 9J, 9½J	244	710	E	B	71	2
9J	8½J, 9½J, 10J	257	711	E	B	72	2
8½J	8J, 8½J, 9J, 9½J	243	689	E	B	71	2
9J	8½J, 9½J, 10J	254	692	E	B	72	2
9½J	9J, 10J	269,5	676,5	E	B	73	2

Description

*For load capacity on various speeds, and inflation figures,please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue , without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



petlas

W 601 SNOW MASTER

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
155/80R 13	79	T	437	190	35
165/80R 13	83	T	487	190	35
145/70R 13	71	T	345	190	36
155/70R 13	75	T	387	190	36
165/70R 13	79	T	437	190	36
165/70R 13 RF	83	T	487	190	42
175/70R 13	82	T	475	190	36
185/70R 13	86	T	530	190	36
155/65R 13	73	T	365	190	36
165/65R 13	77	T	412	190	36
175/65R 13	80	T	450	190	36
175/80R 14	88	T	560	190	35
165/70R 14	81	T	462	190	36
165/70R 14 RF	85	R	515	170	42
175/70R 14	84	T	500	190	36
175/70R 14 RF	88	T	560	190	42
185/70R 14	88	T	560	190	36
195/70R 14	91	T	615	190	36
155/65R 14	75	T	387	190	36
165/65R 14	79	T	437	190	36
175/65R 14	82	T	475	190	36
175/65R 14 RF	86	T	530	190	42
185/65R 14	86	T	530	190	36
165/60R 14	75	T	387	190	36
195/70R 15 RF	97	T	730	190	42
175/65R 15	84	T	500	190	36

Description

*For load capacity on various speeds, and inflation figures,please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue , without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)	F	E	71	2
4,50B, 4½J	4,00B, 4J, 5,00B, 5J	156	580	F	E	71	2
4,50B, 4½J	4,00B, 4J, 5,00B, 5J, 5,50B, 5½J	168	595	E	E	71	2
4,50B, 4½J	3,50B, 3½J, 4,00B, 4J, 5,00B, 5J	144	537	F	E	71	2
4,50B, 4½J	4,00B, 4J, 5,00B, 5J	152	554	F	E	71	2
5,00B, 5J	4,00B, 4J, 4,50B, 4½J, 5,50B, 5½J	167	566	E	E	71	2
5,00B, 5J	4,00B, 4J, 4,50B, 4½J, 5,50B, 5½J	167	566	E	E	71	2
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	177	580	E	E	71	2
5,50B, 5½J	4,50B, 4½J, 5,00B, 5J, 6,00B, 6J	193	593	E	E	71	2
4,50B, 4½J	5,00B, 5J, 5,50B, 5½J	154	536	F	E	71	2
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	170	553	E	E	71	2
5,00B, 5J	5,50B, 5½J, 6,00B, 6J	175	560	E	E	71	2
5J	4½J, 5½J, 6J	177	636	E	E	71	2
5,00B, 5J	4J, 4,50B, 4½J, 5,50B, 5½J	169	590	E	E	71	2
5,00B, 5J	4J, 4,50B, 4½J, 5,50B, 5½J	169	590	E	E	71	2
5,00B, 5J	4½J, 5,50B, 5½J, 6J	177	606	E	E	71	2
5,00B, 5J	4½J, 5,50B, 5½J, 6J	177	606	E	E	71	2
5½J	4½J, 5J, 6J	191	618	E	E	71	2
6J	5J, 5½J, 6½J	201	635	E	E	71	2
4,50B, 4½J	5,00B, 5J, 5,50B, 5½J	155	562	F	E	71	2
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6J	172	575	E	E	71	2
5,00B, 5J	5,50B, 5½J, 6J	174	587	E	E	71	2
5,00B, 5J	5,50B, 5½J, 6J	174	587	E	E	71	2
5½J	5J, 6J, 6½J	189	602	E	E	71	2
5,00B, 5J	4½J, 5½J, 6J	168	560	E	E	71	2
6J	5J, 5½J, 6½J	203	659	E	E	71	2
5J	5½J, 6J	174	612	E	E	71	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



petlas

W 651 SNOW MASTER

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
185/60R 14	82	H	475	210	36
195/60R 14	86	H	530	210	36
185/55R 14	80	H	450	210	36
185/65R 15	88	H	560	210	36
185/65R 15 RF	92	H	630	210	42
195/65R 15	91	H	615	210	36
195/65R 15 RF	95	H	690	210	42
205/65R 15	94	H	670	210	36
215/65R 15	96	H	710	210	36
185/60R 15	84	H	500	210	36
195/60R 15	88	H	560	210	36
205/60R 15	91	H	615	210	36
185/55R 15	82	H	475	210	36
195/55R 15	85	H	515	210	36
205/55R 15	88	V	560	240	36
205/55R 15 RF	92	V	630	240	42
195/50R 15*	82	H	475	210	36
205/50R 15*	86	H	530	210	36
205/65R 16	95	H	690	210	36
215/65R 16	98	H	750	210	36
215/65R 16 RF	102	T	850	190	42
205/60R 16	92	H	630	210	36
215/60R 16	95	H	690	210	36
225/60R 16	98	H	750	210	36
235/60R 16	100	H	800	210	36
185/55R 16 RF*	87	H	545	210	42
195/55R 16	87	H	545	210	36
205/55R 16	91	H	615	210	36
205/55R 16 RFT*	91	H	615	210	36
215/55R 16	93	H	650	210	36
225/55R 16	95	H	690	210	36
195/50R 16 *	84	H	500	210	36
205/50R 16 *	87	H	545	210	36
205/50R 16 RF	91	H	615	210	42
225/50R 16 RF*	96	V	710	240	42
195/45R 16 RF*	85	H	515	210	42
205/45R 16 RF*	87	H	545	210	42
215/45R 16 RF*	90	V	600	240	42
205/55R 17*	91	H	615	210	36
215/55R 17 RF	98	V	750	240	42
225/55R 17	97	H	730	210	36
225/55R 17 RF	101	V	825	240	42
225/55RF 17 RFT	97	V	730	240	36
235/55R 17 RF*	103	V	875	240	42
205/50R 17 RF*	93	V	650	240	42
215/50R 17 RF*	91	H	615	210	36
225/50R 17 RF*	98	V	750	240	42
205/45R 17 RF*	88	H	560	210	42
215/45R 17 RF*	91	V	615	240	42
225/45R 17 RF*	94	V	670	240	42
235/45R 17 RF*	97	V	730	240	42
245/45R 17 RF*	99	V	775	240	42
245/40R 17 RF*	95	V	690	240	42
215/50R 18	92	V	630	240	36
245/50R 18 RF*	104	V	900	240	42
215/45R 18 RF*	93	V	650	240	42
225/45R 18 RF*	95	V	690	240	42
235/45R 18 RF*	98	V	750	240	42
245/45R 18 RF*	100	V	800	240	42
225/40R 18 RF*	92	V	630	240	42
235/40R 18 RF*	95	V	690	240	42
245/40R 18 RF*	97	V	730	240	42
235/50R 19 RF*	103	V	875	240	42
245/45R 19 RF*	102	V	850	240	42
245/40R 19 RF*	98	V	750	240	42
255/40R 19 RF*	100	V	800	240	42

*Sizes with rim guard

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	dB
5½J	5J, 6J, 6½J	189	581	E	C	71	2
6J	5½J, 6½J, 7J	201	592	E	C	71	2
6J	5J, 5½J, 6½J	192	564	E	C	71	2
5½J	5J, 6J, 6½J	190	627	E	C	71	2
5½J	5J, 6J, 6½J	190	627	E	C	71	2
6J	5½J, 6½J, 7J	201	640	E	C	71	2
6J	5½J, 6½J, 7J	201	640	E	C	71	2
6J	5½J, 6½J, 7J, 7½J	207	652	E	C	71	2
6½J	6J, 7J, 7½J	221	661	E	C	71	2
5½J	5J, 6J, 6½J	189	608	E	C	71	2
6J	5½J, 6½J, 7J	198	622	E	C	71	2
6J	5½J, 6½J, 7J, 7½J	208	631	E	C	71	2
6J	5J, 5½J, 6½J	191	592	E	C	71	2
6J	5½J, 6½J, 7J	195	604	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	213	610	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	213	610	E	C	71	2
6J	5½J, 6½J, 7J	196	583	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	210	590	E	C	71	2
6J	5½J, 6½J, 7J, 7½J	209	675	E	C	71	2
6½J	6J, 7J, 7½J	221	686	E	C	71	2
6½J	6J, 7J, 7½J	221	690	E	C	71	2
6J	5½J, 6½J, 7J, 7½J	209	657	E	C	71	2
6½J	6J, 7J, 7½J	221	667	E	C	71	2
6½J	6J, 7J, 7½J, 8J	228	680	E	C	71	2
7J	6½J, 7½J, 8J, 8½J	241	690	E	C	71	2
6J	5J, 5½J, 6½J	192	615	E	C	71	2
6J	5½J, 6½J, 7J	196	629	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	635	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	215	635	E	C	71	2
7J	6J, 6½J, 7½J	226	642	E	C	71	2
7J	6J, 6½J, 7½J, 8J	230	658	E	C	71	2
6J	5½J, 6½J, 7J	196	608	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	209	614	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	209	614	E	C	71	2
7J	6J, 6½J, 7½J, 8J	222	640	E	C	71	2
6½J	6J, 7J, 7½J	195	586	E	C	71	2
7J	6½J, 7J, 7½J	203	595	E	C	71	2
7J	7½J, 8J	211	604	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	209	659	E	C	71	2
7J	6J, 6½J, 7½J	221	674	E	C	71	2
7J	6J, 6½J, 7½J, 8J	228	688	E	C	71	2
7J	6J, 6½J, 7½J, 8J	228	688	E	C	71	2
7J	6J, 6½J, 7½J, 8J	228.5	686	F	C	71	2
7½J	6½J, 7J, 8J, 8½J	240	690	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	638	E	C	71	2
7J	6J, 6½J, 7½J	217	655	E	C	71	2
7J	6J, 6½J, 7½J, 8J	221	666	E	C	71	2
7J	6½J, 7½J	206	619	E	C	71	2
7J	7½J, 8J	206	633	E	C	71	2
7½J	7J, 8J, 8½J	223	642	E	C	71	2
8J	7½J, 8½J, 9J	230	648	E	C	71	2
8J	7½J, 8½J, 9J	243	661	E	C	71	2
8½J	8J, 9J, 9½J	244	632	E	C	71	2
7J	6J, 6½J, 7½J	217	674	E	C	71	2
7½J	7J, 8J, 8½J	246	710	C	C	71	2
7J	7½J, 8J	225	652	E	C	71	2
7½J	7J, 8J, 8½J	223	662	E	C	71	2
8J	7½J, 8½J, 9J	236	669	E	C	71	2
8J	7½J, 8½J, 9J	236	684	E	C	71	2
8J	7½J, 8½J, 9J	230	644	E	C	71	2
8½J	8J, 9J, 9½J	237	650	E	C	71	2
8½J	8J, 9J, 9½J	240	661	E	C	71	2
7½J	6½J, 7J, 8J, 8½J	237	727	C	C	71	2
8J	7½J, 8½J, 9J	241	708	C	C	71	2
8½J	8J, 9J, 9½J	244	684	E	C	71	2
9J	8½J, 9½J, 10J	262	689	C	C	72	2



petlas

PT 411 EXPLERO A/S

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)
235/75R 15	105	H	925	210	36
205/70R 15	96	H	710	210	36
215/70R 15	98	H	750	210	36
215/70R 16	100	H	800	210	36
225/70R 16 RF	107	T	975	190	42
235/70R 16	106	H	950	210	36
245/70R 16	107	H	975	210	36
255/70R 16	111	T	1090	190	36
265/70R 16	112	T	1120	190	36
215/65R 16	98	H	750	210	36
215/65R 16 RF	102	H	850	210	42
255/65R 16	109	H	1030	210	36
215/60R 16	95	H	690	210	36
235/60R 16	100	H	800	210	36
215/65R 17	99	H	775	210	36
225/65R 17	102	H	850	210	36
235/65R 17 RF	108	H	1000	210	42
245/65R 17 RF	111	H	1090	210	42
255/65R 17	110	H	1060	210	36
265/65R 17	112	H	1120	210	36
225/60R 17 RF	103	H	875	210	42

PT 421 EXPLERO A/T

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)
215/80R 15*	102	S	850	180	35
235/75R 15*	105	T	925	190	36
255/70R 15*	108	T	1000	190	36
265/70R 15*	112	T	1120	190	36
265/70R 15 RF	116	T	1250	190	42
215/65R 16*	98	T	750	190	36
205/80R 16 RF*	104	T	900	190	42
235/70R 16*	106	T	950	190	36
245/70R 16 RF*	111	T	1090	190	42
265/65R 17 RF*	116	S	1250	180	42
265/60R 18 RF*	114	T	1180	190	42

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures,please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue , without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6½J	6J, 7J, 7½J, 8J	241	728	C	E	71	2
6J	5J, 5½J, 6½J, 7J	209	674	E	E	70	2
6½J	5½J, 6J, 7J	229	680	E	E	70	2
6½J	5½J, 6J, 7J	229	705	C	E	70	2
6½J	6J, 7J, 7½J	234	719	C	E	71	2
7J	6J, 6½J, 7½J, 8J	246	731	C	E	71	2
7J	6½J, 7½J, 8J	248	750	C	E	71	2
7½J	6½J, 7J, 8J, 8½J	260	764	C	E	72	2
8J	7J, 7½J, 8½J, 9J	272	778	C	E	72	2
6½J	6J, 7J, 7½J	224	689	E	E	70	2
6½J	6J, 7J, 7½J	224	689	C	E	70	2
7½J	7J, 8J, 8½J, 9J	264	734	C	E	72	2
6½J	6J, 7J, 7½J	222	662	E	E	70	2
7J	6½J, 7½J, 8J, 8½J	241	684	C	E	71	2
6½J	6J, 7J, 7½J	222	712	E	E	70	2
6½J	6J, 7J, 7½J, 8J	230	724	C	E	71	2
7J	6½J, 7½J, 8J, 8½J	240	739	C	E	71	2
7J	7½J, 8J, 8½J	247	748	C	E	71	2
7½J	7J, 8J, 8½J, 9J	263	761	C	E	72	2
8J	7½J, 8½J, 9J, 9½J	276	773	C	E	72	2
6½J	6J, 7J, 7½J, 8J	228	703	C	E	71	2



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6J	5½J, 6½J, 7J	218	728	E	E	71	2
6½J	6J, 7J, 7½J, 8J	244	726	E	E	71	2
7½J	6½J, 7J, 8J, 8½J	271	732	E	E	72	2
8J	7J, 7½J, 8½J, 9J	273	746	E	E	72	2
8J	7J, 7½J, 8½J, 9J	273	746	E	E	73	2
6½J	6J, 7J, 7½J	228	678	E	E	71	2
5½J	5J, 6J, 6½J, 7J	209	727	E	E	71	2
7J	6J, 6½J, 7½J, 8J	241	731	E	E	71	2
7J	6½J, 7½J, 8J	248	750	E	E	71	2
8J	7½J, 8½J, 9J, 9½J	274	771	E	E	73	2
8J	7½J, 8½J, 9J, 9½J	263	773	E	E	73	2



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

Petlas

PT 431 EXLERO H/T

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
235/65R 17 RF	108	V	1000	240	42
215/60R 17*	96	V	710	240	36
235/60R 17*	102	V	850	240	36
255/60R 17*	106	V	950	240	36
225/60R 18*	100	H	800	210	36
235/60R 18 RF*	107	V	975	240	42
245/60R 18*	105	H	925	210	36
255/60R 18 RF*	112	V	1120	240	42
265/60R 18*	110	H	1060	210	36
265/60R 18*	110	V	1060	240	36
225/55R 17*	97	V	730	240	36
235/55R 17 RF*	103	V	875	240	42
215/55R 18*	95	H	690	210	36
225/55R 18*	98	V	750	240	36
235/55R 18*	100	V	800	240	36
255/55R 18 RF*	109	V	1030	240	42
225/55R 19*	99	H	775	210	36
235/55R 19 RF*	105	V	925	240	42
245/55R 19*	103	H	875	210	36
255/55R 19 RF*	111	V	1090	240	42
275/55R 19*	111	V	1090	240	36
235/50R 18 RF*	101	V	825	240	42
255/50R 19 RF*	107	V	975	240	42
255/50ZR 19 RFT*	107	W	975	270	42
265/50ZR 19 RF*	110	W	1060	270	42
275/45ZR 19 RF*	108	W	1000	270	42
285/45R 19*	107	V	975	240	36
275/45ZR 20 RF*	110	W	1060	270	42
275/40ZR 20*	102	W	850	270	36

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures,please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue , without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIEMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
7J	6½J, 7½J, 8J, 8½J	240	738	B	C	71	2
6½J	6J, 7J, 7½J	221	690	C	C	71	2
7J	6½J, 7½J, 8J, 8½J	240	714	C	C	71	2
7½J	7J, 8J, 8½J, 9J	260	736	C	C	72	2
6½J	6J, 7J, 7½J, 8J	228	727	B	C	71	2
7J	6½J, 7½J, 8J, 8½J	240	739	B	C	71	2
7J	7½J, 8J, 8½J	248	751	B	C	71	2
7½J	7J, 8J, 8½J, 9J	261	763	B	C	72	2
8J	7½J, 8½J, 9J, 9½J	272	775	B	C	72	2
8J	7½J, 8½J, 9J, 9½J	272	775	B	C	72	2
7J	6J, 6½J, 7½J, 8J	233	680	C	C	71	2
7½J	6½J, 7J, 8J, 8½J	245	690	C	C	71	2
7J	6J, 6½J, 7½J	226	693	C	C	71	2
7J	6J, 6½J, 7½J, 8J	233	705	C	C	71	2
7½J	6½J, 7J, 8J, 8½J	245	715	C	C	71	2
8J	7J, 7½J, 8½J, 9J	262	735	B	C	72	2
7J	6J, 6½J, 7½J, 8J	233	731	C	C	71	2
7½J	6½J, 7J, 8J, 8½J	245	741	C	C	71	2
7½J	7J, 8J, 8½J	253	753	C	C	71	2
8J	7J, 7½J, 8½J, 9J	260	761	B	C	72	2
8½J	7½J, 8J, 9J, 9½J	283	783	B	C	72	2
7½J	6½J, 7J, 8J, 8½J	240	688	B	C	71	2
8J	7J, 7½J, 8½J, 9J	265	739	B	C	72	2
8J	7J, 7½J, 8½J, 9J	258	745	C	C	72	2
8½J	7½J, 8J, 9J, 9½J	277	749	B	C	72	2
9J	8½J, 9½J, 10J, 10½J	268	731	B	C	72	2
9½J	9J, 10J, 10½J	283	740	B	C	72	2
9J	8½J, 9½J, 10J, 10½J	270	758	B	C	72	2
9½J	9J, 10J, 10½J, 11J	273	729	B	C	72	2

Description

*For load capacity on various speeds, and inflation figures,please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue , without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



petlas

W 671 EXPLERO

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)
235/75R 15 RF	109	T	1030	190	42
205/70R 15	96	T	710	190	42
215/70R 15	98	H	750	210	42
205/80R 16 RF	104	T	900	190	42
215/70R 16 RF	104	H	900	210	36
225/70R 16 RF	107	H	975	210	42
235/70R 16	106	T	950	190	42
245/70R 16	111	T	1090	190	42
255/70R 16	111	T	1090	190	42
265/70R 16	112	T	1120	190	36
215/65R 17	99	H	775	210	42
225/65R 17 RF	106	H	950	210	42
235/65R 17 RF	108	V	1000	240	36
245/65R 17 RF	111	H	1090	210	36
255/65R 17 RF	114	H	1180	210	42
265/65R 17 RF	116	H	1250	210	42
215/60R 17 RF	100	H	800	210	36
225/60R 17 RF	103	V	875	240	42
235/60R 17 RF	106	H	950	210	36
255/60R 17 RF	110	V	1060	240	42
235/55R 17 RF*	103	V	875	240	42
225/60R 18 RF	104	V	900	240	36
235/60R 18 RF	107	H	975	210	42
245/60R 18	105	H	925	210	42
255/60R 18 RF	112	H	1120	210	42
265/60R 18 RF*	114	H	1180	210	42
215/55R 18*	95	H	690	210	42
225/55R 18 RF*	102	H	850	210	42
235/55R 18 RF*	104	H	900	210	42
255/55R 18 RF*	109	V	1030	240	36
235/50R 18 RF*	101	V	825	240	42
225/55R 19*	99	H	775	210	42
235/55R 19 RF*	105	V	925	240	42
245/55R 19*	103	H	875	210	42
255/55R 19 RF*	111	V	1090	240	42
275/55R 19*	111	H	1090	210	42
235/50R 19 RF*	103	V	875	240	36
255/50R 19 RF*	107	V	975	240	36
255/50R 19 RFT*	107	V	975	240	42
225/45R 19 RF*	96	V	710	240	36
285/45R 19 RF*	111	H	1090	210	41
245/50R 20*	102	V	850	240	42
265/50R 20 RF*	111	H	1090	210	42
275/45R 20 RF*	110	V	1060	240	36
275/40R 20 RF*	106	V	950	240	42

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures,please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue , without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
8J	7J, 7½J, 8½J, 9J	258	748	C	C	71	2
9J	8½J, 9½J, 10J, 10½J	266	760	E	C	73	2
6½J	6J, 7J, 7½J, 8J	228	735	E	C	70	2
7½J	6½J, 7J, 8J, 8½J	238	698	E	C	70	2
7½J	7J, 8J, 8½J	255	755	E	C	71	2
7½J	7J, 8J, 8½J	227	688	C	C	70	2
7J	6J, 6½J, 7½J, 8J	228	711	C	C	70	2
8J	7J, 7½J, 8½J, 9J	261	743	C	C	71	2
8J	7J, 7½J, 8½J, 9J	262	765	C	C	71	2
7J	6J, 6½J, 7½J	222	699	C	C	70	2
7½J	6½J, 7J, 8J, 8½J	244	721	E	C	70	2
6½J	6J, 7J, 7½J	217	694	C	C	70	2
7J	6J, 6½J, 7½J, 8J	230	732	C	C	70	2
8½J	7½J, 8J, 9J, 9½J	283	785	C	C	72	2
8J	7J, 7½J, 8½J, 9J	265	739	C	C	71	2
7J	6½J, 7½J, 8J, 8½J	240	744	C	C	70	2
6½J	6J, 7J, 7½J	218	711	E	C	70	2
6½J	6J, 7J, 7½J, 8J	227	706	C	C	70	2
7J	7½J, 8J, 8½J	255	755	C	C	70	2
7½J	6½J, 7J, 8J, 8½J	250	741	C	C	70	2
7½J	6½J, 7J, 8J, 8½J	245	719	C	C	70	2
7½J	7J, 8J, 8½J	248	753	C	C	70	2
7½J	6½J, 7J, 8J, 8½J	244	694	C	C	70	2
8J	7½J, 8½J, 9J, 9½J	272	775	C	C	72	2
8½J	7½J, 8J, 9J, 9½J	277	774	C	C	72	2
7½J	7J, 8J, 8½J, 9J	260	766	C	C	71	2
6½J	6J, 7J, 7½J	233	724	E	C	70	2
7J	7½J, 8J, 8½J	243	752	C	C	70	2
7J	6½J, 7½J, 8J, 8½J	240	717	C	C	70	2
8J	7J, 7½J, 8½J, 9J	272	778	C	C	71	2
8J	7½J, 8½J, 9J, 9½J	273	774	C	C	71	2
9½J	9J, 10J, 10½J	285	739	C	C	72	2
9½J	9J, 10J, 10½J, 11J	278	728	C	C	73	2
6½J	5½J, 6J, 7J	224	710	C	C	70	2
6½J	6J, 7J, 7½J, 8J	229	726	C	C	70	2
7½J	7J, 8J, 8½J, 9J	260	762	C	C	71	2
7½J	6½J, 7J, 8J, 8½J	260	764	C	C	71	2
6J	5J, 5½J, 6½J, 7J	212	667	C	C	70	2
7J	6½J, 7½J, 8J, 8½J	240	738	E	C	70	2
6½J	5½J, 6J, 7J	225	680	E	C	70	2
5½J	5J, 6J, 6½J, 7J	209	728	C	C	70	2
7½J	7J, 8J, 8½J, 9J	260	738	E	C	71	2
6½J	6J, 7J, 7½J, 8J	235	732	C	C	70	2
7J	6J, 6½J, 7½J, 8J	240	736	C	C	70	2
7J	6½J, 7½J, 8J	248	750	E	C	70	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



petlas

TECHNICAL DATA

PT 825 FULL POWER

LOAD CAPACITY (kg)					
TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
195R 14 C	8PR	106/104	R	1900	3600
195R 15 C	8PR	106/104	R	1900	3600
225/70 R 15 C	8PR	112/110	R	2240	4240
225/70 R 15 C	16PR	116/114	R	2500	4720

PT 825 FULL POWER PLUS

LOAD CAPACITY (kg)					
TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
5,00R 12 C	8PR	83/81	P	974	1848
155R 12 C	8PR	88/86	N	1120	2120
155R 13 C	6PR	85/83	N	1030	1948
185R 14 C	8PR	102/100	R	1700	3200
165/70R 14 C	6PR	89/87	R	1160	2180
185R 15 C	8PR	103/102	R	1750	3400
195/70R 15 C	8PR	104/102	R	1800	3400
205/70R 15 C	8PR	106/104	R	1900	3600
215/70R 15 C	8PR	109/107	S	2060	3900
205/65R 15 C	8PR	102/100	T	1700	3200
175/75R 16 C	8PR	101/99	R	1650	3100
185/75R 16 C	8PR	104/102	R	1800	3400
195/75R 16 C	8PR	107/105	R	1950	3700
205/75R 16 C	8PR	110/108	R	2120	4000
205/75R 16 C	10PR	113/111	R	2300	4360
215/75R 16 C	8PR	113/111	R	2300	4360
215/75R 16 C	10PR	116/114	R	2500	4720
225/75R 16 C	8PR	118/116	R	2640	5000
205/65R 16 C	8PR	107/105	T	1950	3700
215/65R 16 C	8PR	109/107	R	2060	3900
225/65R 16 C	8PR	112/110	R	2240	4240
235/65R 16 C	8PR	115/113	R	2430	4600

Description

*For load capacity on various speeds, and inflation figures,please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue , without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL		
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB
170	65	5½J	5J, 6J	196	669	E	A	72 2
170	65	5½J	5J, 6J	196	691	E	A	72 2
170	65	6½J	6J, 7J	228	697	E	A	72 2
170	80	6½J	6J, 7J	228	697	E	A	72 2



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL		
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB
150	65	3½J	3½J	141	565	F	B	71 2
140	65	4½J	4,00B, 4,50B, 4J, 5J	155	552	F	B	72 2
140	51	4½J	4,00B, 4,50B, 4J, 5,00B, 5J	154	573	F	B	72 2
170	65	5½J	5J, 6J	185	650	E	A	71 2
170	54	5J	4½J	167	592	E	B	72 2
170	65	5½J	5J, 6J	186	675	E	A	71 2
170	65	6J	5J, 5½J	196	651	E	A	72 2
170	65	6J	5½J, 6½J	206	668	E	A	72 2
180	65	6½J	5½J, 6J, 7J	222	679	E	A	72 2
190	54	6J	5½J, 6½J	206	650	C	A	71 2
170	69	5J	4 ½J, 5½J,	170	668	E	A	72 2
170	69	5J	5½J, 6J	180	684	E	A	72 2
170	69	5½J	5J, 6J	192	698	E	A	72 2
170	69	5½J	6J, 6½J	200	712	E	A	72 2
170	76	5½J	6J, 6½J	200	712	E	A	72 2
170	69	6J	5½J, 6½J, 7J	216	734	E	A	72 2
170	76	6J	5½J, 6½J, 7J	216	734	E	A	72 2
170	76	6J	6½J, 7J	224	740	E	A	72 2
190	69	6J	5½J, 6½J	206	677	C	A	71 2
170	69	6½J	6J, 7J	219	684	E	A	72 2
170	69	6½J	6J, 7J	223	702	E	A	72 2
170	69	7J	6½J, 7½J	238	717	E	A	72 2



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

Petlas

PT 835 FULL POWER

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
215/65R 15 C	6PR	104/102	T	1800	3400
225/70R 15 C	8PR	112/110	R	2240	4240
195/60R 16 C	6PR	99/97	T	1550	2920
285/65R 16 C	10PR	128	N	3600	-
235/65R 16 C	12PR	121/119	R	2900	5440
235/65R 16 C	8PR	115/113	R	2430	4600
215/65R 16 C	8PR	109/107	T	2060	3900
205/65R 16 C	8PR	107/105	T	1950	3700
195/65R 16 C	8PR	104/102	T	1800	3400
215/75R 16 C	10PR	116/114	R	2500	4720
215/75R 16 C	8PR	113/111	R	2300	4360
205/75R 16 C	8PR	110/108	R	2120	4000

PT 825 ADVENTE

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
155R 12 C	8PR	88/86	N	1120	2120
155R 13 C	8PR	90/89	N	1200	2320
185R 14 C	8PR	102/100	R	1700	3200
195R 14 C	8PR	106/104	R	1900	3600
195/70R 15 C	8PR	104/102	R	1800	3400
205/70R 15 C	8PR	106/104	R	1900	3600
215/70R 15 C	8PR	109/107	R	2060	3900
225/70R 15 C	8PR	112/110	R	2240	4240
205/65R 15 C	8PR	102/100	T	1700	3200
185/75R 16 C	8PR	104/102	R	1800	3400
195/75R 16 C	8PR	107/105	R	1950	3700
205/75R 16 C	8PR	110/108	R	2120	4000
215/75R 16 C	8PR	113/111	R	2300	4360
225/75R 16 C	8PR	118/116	R	2640	5000
205/65R 16 C	8PR	107/105	T	1950	3700
215/65R 16 C	8PR	109/107	R	2060	3900
225/65R 16 C	8PR	112/110	R	2240	4240
235/65R 16 C	8PR	115/113	R	2430	4600

Description

*For load capacity on various speeds, and inflation figures,please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue , without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
190	54	6½J	6J, 7J	218	660	C	A	71	2
170	65	6½J	6J, 7J	227	694	C	A	72	2
190	54	6J	5½J, 6½J	201	645	E	A	71	2
140	76	8½J	8J, 9J	298	777	C	A	72	2
170	83	7J	6½J, 7½J	240	716	C	A	72	2
170	69	7J	6½J, 7½J	240	716	C	A	72	2
190	69	6½J	6J, 7J	218	682	C	A	71	2
190	69	6J	5½J, 6½J	205	674	C	A	71	2
190	69	6J	5½J	201	660	E	A	71	2
170	76	6J	5½J, 6½J, 7J	213	723	C	A	71	2
170	69	6J	5½J, 6½J, 7J	216	728	C	A	71	2
170	69	5½J	6J, 6½J	201	709	C	A	71	2



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
140	65	4½J	4,00B, 4,50B, 4J, 5J	157	550	F	C	71	2
140	65	4½J	4,00B, 4,50B, 4J, 5,00B, 5J	157	578	F	C	71	2
170	65	5½J	5J, 6J	188	650	F	B	71	2
170	65	5½J	5J, 6J	198	666	F	A	71	2
170	65	6J	5J, 5½J	201	655	F	A	71	2
170	65	6J	5½J, 6½J	209	669	F	A	71	2
170	65	6½J	5½J, 6J, 7J	221	683	F	A	71	2
170	65	6½J	6J, 7J	228	697	F	A	71	2
190	54	6J	5½J, 6½J	209	647	E	A	71	2
170	69	5J	5½J, 6J	184	685	F	B	71	2
170	69	5½J	5j, 6J	196	699	F	A	71	2
170	69	5½J	6J, 6½J	203	715	F	A	71	2
170	69	6J	5½J, 6½J, 7J	216	729	F	A	71	2
170	76	6J	6½J, 7J	223	744	F	A	71	2
190	69	6J	5½J, 6½J	209	673	E	A	71	2
170	69	6½J	6J, 7J	221	686	F	A	71	2
170	69	6½J	6J, 7J	228	699	F	A	71	2
170	69	7J	6½J, 7½J	240	712	F	A	71	2



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue , without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

Petlas

PT 925 FULL GRIP

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
155R 12 C	8PR	88/86	N	1120	2120
155R 13 C	6PR	85/83	N	1030	1948
185R 14 C	8PR	102/100	R	1700	3200
195R 14 C	8PR	106/104	R	1900	3600
195/70R 15 C	8PR	104/102	R	1800	3400
205/70R 15 C	8PR	106/104	R	1900	3600
215/70R 15 C	8PR	109/107	R	2060	3900
225/70R 15 C	8PR	112/110	R	2240	4240
205/65R 15 C	8PR	102/100	T	1700	3200
175/75R 16 C	8PR	101/99	R	1650	3100
185/75R 16 C	8PR	104/102	R	1800	3400
195/75R 16 C	8PR	107/105	R	1950	3700
205/75R 16 C	8PR	110/108	R	2120	4000
215/75R 16 C	8PR	113/111	R	2300	4360
225/75R 16 C	8PR	118/116	R	2640	5000
205/65R 16 C	8PR	107/105	T	1950	3700
215/65R 16 C	8PR	109/107	R	2060	3900
225/65R 16 C	8PR	112/110	R	2240	4240
235/65R 16 C	8PR	115/113	R	2430	4600
195/60R 16 C	6PR	99/97	T	1550	2920

PT 935 FULL GRIP

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
155R 12 C	8PR	88/86	N	1120	2120
155R 13 C	6PR	85/83	N	1030	1948
185R 14 C	8PR	102/100	R	1700	3200
195R 14 C	8PR	106/104	R	1900	3600
195/70R 15 C	8PR	104/102	R	1800	3400
205/70R 15 C	8PR	106/104	R	1900	3600
225/70R 15 C	8PR	112/110	R	2240	4240
215/65R 15 C	6PR	104/102	T	1800	3400
185/75R 16 C	8PR	104/102	R	1800	3400
195/75R 16 C	8PR	107/105	R	1950	3700
205/75R 16 C	10PR	113/111	R	2300	4360
215/75R 16 C	10PR	116/114	R	2500	4720
225/75R 16 C	8PR	118/116	R	2640	5000
195/65R 16 C	8PR	104/102	T	1800	3400
205/65R 16 C	8PR	107/105	T	1950	3700
215/65R 16 C	8PR	109/107	R	2060	3900
225/65R 16 C	8PR	112/110	R	2240	4240
235/65R 16 C	12PR	121/119	R	2900	5440
285/65R 16 C	10PR	128	N	3600	-
195/60R 16 C	6PR	99/97	T	1550	2920

Description

*For load capacity on various speeds, and inflation figures,please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue , without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
140	65	4½J	4,00B, 4,50B, 4J, 5J	157	551	G	C	71	2
140	51	4½J	4,00B, 4,50B, 4J, 5,00B, 5J	157	578	G	C	71	2
170	65	5½J	5J, 6J	188	650	G	B	71	2
170	65	5½J	5J, 6J	198	670	G	B	73	2
170	65	6J	5½J, 5½J	201	655	G	B	73	2
170	65	6J	5½J, 6½J	209	669	F	B	73	2
170	65	6½J	5½J, 6J, 7J	221	683	F	B	73	2
170	65	6½J	6J, 7J	228	697	F	B	72	2
190	54	6J	5½J, 6½J	209	647	F	B	73	2
170	69	5J	4 ½J, 5½J,	172	672	G	B	73	2
170	69	5J	5½J, 6J	180	692	G	B	73	2
170	69	5½J	5J, 6J	196	708	G	B	73	2
170	69	5½J	6J, 6½J	203	718	F	B	73	2
170	69	6J	5½J, 6½J, 7J	216	734	F	B	73	2
170	76	6J	6½J, 7J	223	744	F	B	73	2
190	69	6J	5½J, 6½J	209	672	F	B	73	2
170	69	6½J	6J, 7J	221	687	F	B	73	2
170	69	6½J	6J, 7J	228	699	F	B	73	2
170	69	7J	6½J, 7½J	240	712	F	B	73	2
190	54	6J	5½J, 6½J	201	640	G	B	73	2



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
140	65	4½J	4,00B, 4,50B, 4J, 5J	154	550	F	B	73	2
140	51	4½J	4,00B, 4,50B, 4J, 5,00B, 5J	157	578	F	B	73	2
170	65	5½J	5J, 6J	188	650	G	B	73	2
170	65	5½J	5J, 6J	198	666	F	B	73	2
170	65	6J	5J, 5½J	198	661	F	B	73	2
170	65	6J	5½J, 6½J	221	673	F	B	73	2
170	65	6½J	6J, 7J	222	698	F	B	73	2
190	54	6½J	6J, 7J	211	660	F	A	73	2
170	69	5J	5½J, 6J	184	684	G	B	73	2
170	69	5½J	5J, 6J	196	698	F	B	73	2
170	76	5½J	6J, 6½J	203	711	F	B	73	2
170	76	6J	5½J, 6½J, 7J	216	728	F	B	73	2
170	76	6J	6½J, 7J	225	747	F	B	73	2
190	69	6J	5½J	201	660	G	B	73	2
190	69	6J	5½J, 6½J	200	677	F	B	73	2
170	69	6½J	6J, 7J	215	690	F	B	73	2
170	69	6½J	6J, 7J	228	698	F	B	73	2
170	80	7J	6½J, 7½J	238	716	F	B	73	2
140	76	8½J	8J, 9J	297	778	F	A	75	2
190	54	6J	5½J, 6½J	201	640	F	B	73	2



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

Petlas



Petlas Passenger, Light Truck and 4x4 Tires are characterized by quality workmanship, leading edge technology, unique tread designs and excellent performance offering perfect mix of quality and value.

Our success depends on exceeding the expectations of our customers and standing behind everything we do.

Our aim is to build long term relationships with our customers by providing excellent service, quality and delivering our promises.






petlas
TRACK OF TRUST

2018 EDITION

DISTRIBUTED BY

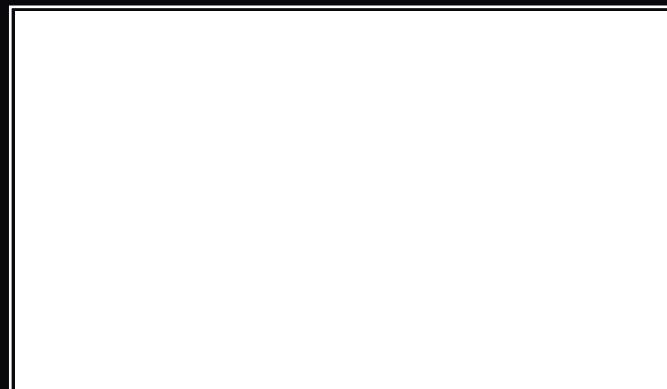

petlas

Headquarters - Factory

Petlas Tire Industry and Trade
Kindam Mahallesi Ankara - Kayseri Caddesi
No: 2/1 Kırşehir / TURKEY
T: +90 386 252 65 50 • F: +90 386 252 65 70

Int. Sales & Marketing

Petlas Tire Industry and Trade
Kazım Karabekir Cd. Özcan Plaza
No: 124 06050 Ankara / TURKEY
T: +90 312 309 30 30 • F: +90 312 310 95 09

Petlas Tire USA

1111 E. Lincolnway STE 205
Cheyenne, WY 82001 USA

www.petlas.com

MADE IN TURKEY